


Защита АВВ термична за контактор 2.3-3.1 А, Т16-3.1

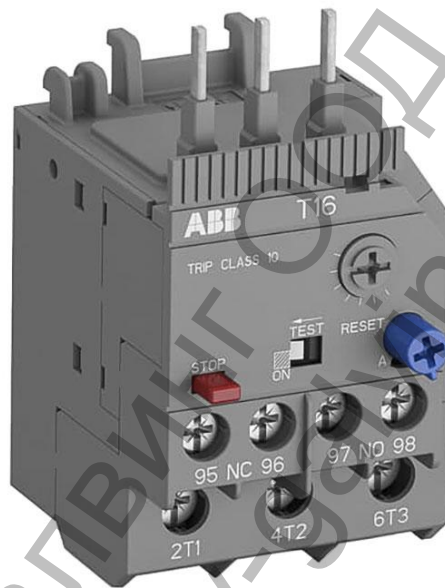

Thermal overload relays are economic electromechanical protection devices for the main circuit. They are used mainly to protect motors against overload and phase failures. Starter combinations


are setup together with contactors.

Description

- Overload protection – trip class 10
- Phase loss sensitivity
- Temperature compensation from -25...+60 °C
- Adjustable current setting for overload protection
- Automatic or manual reset selectable
- Suitable for three- and single-phase application
- Trip-free mechanism

- Status indication
- STOP and TEST function
- Direct mounting onto mini contactors or block contactors

Setting range	Type	Order code	Weight Pkg
0.10...0.13	T16-0.13	1SAZ711201R1005	0.100
0.13...0.17	T16-0.17	1SAZ711201R1008	0.100
0.17...0.23	T16-0.23	1SAZ711201R1009	0.100
0.23...0.31	T16-0.31	1SAZ711201R1013	0.100
0.31...0.41	T16-0.41	1SAZ711201R1014	0.100
0.41...0.55	T16-0.55	1SAZ711201R1017	0.100
0.55...0.74	T16-0.74	1SAZ711201R1021	0.100
0.74...1.00	T16-1.0	1SAZ711201R1023	0.100
1.00...1.30	T16-1.3	1SAZ711201R1025	0.100
1.30...1.70	T16-1.7	1SAZ711201R1028	0.100
1.70...2.30	T16-2.3	1SAZ711201R1031	0.100
2.30...3.10	T16-3.1	1SAZ711201R1033	0.100
3.10...4.20	T16-4.2	1SAZ711201R1035	0.100
4.20...5.70	T16-5.7	1SAZ711201R1038	0.100
5.70...7.60	T16-7.6	1SAZ711201R1040	0.100
7.60...10.0	T16-10	1SAZ711201R1043	0.104
10.0...13.0	T16-13	1SAZ711201R1045	0.104
13.0...16.0	T16-16	1SAZ711201R1047	0.104

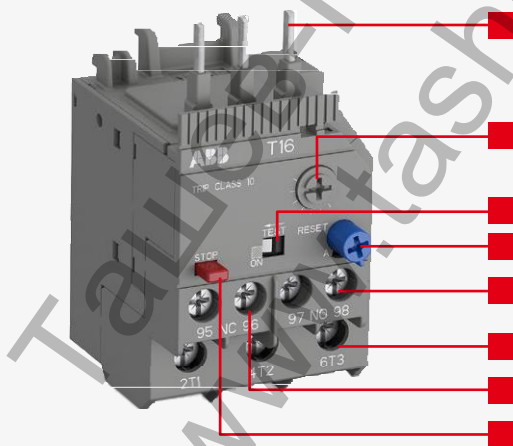

Functional description

1. Terminals 1L1, 3L2, 5L3
2. Current setting range
Adjustable current setting for overload protection
3. Status indication
4. RESET button
Automatic or manual reset selectable

5. Signaling contacts 97-98
6. Terminals 2T1, 4T2, 6T3
7. Tripping contacts 95-96
8. STOP button

Продукт: [Защита АВВ термична за контактор 2.3-3.1 А, Т16-3.1](#)

Категория: [Контактори и защитни релета](#)

Бранд: [АВВ](#)

Категория бранд: [Защита АВВ](#)

Ташев-Галвинг ООД
www.tashev-galving.com