


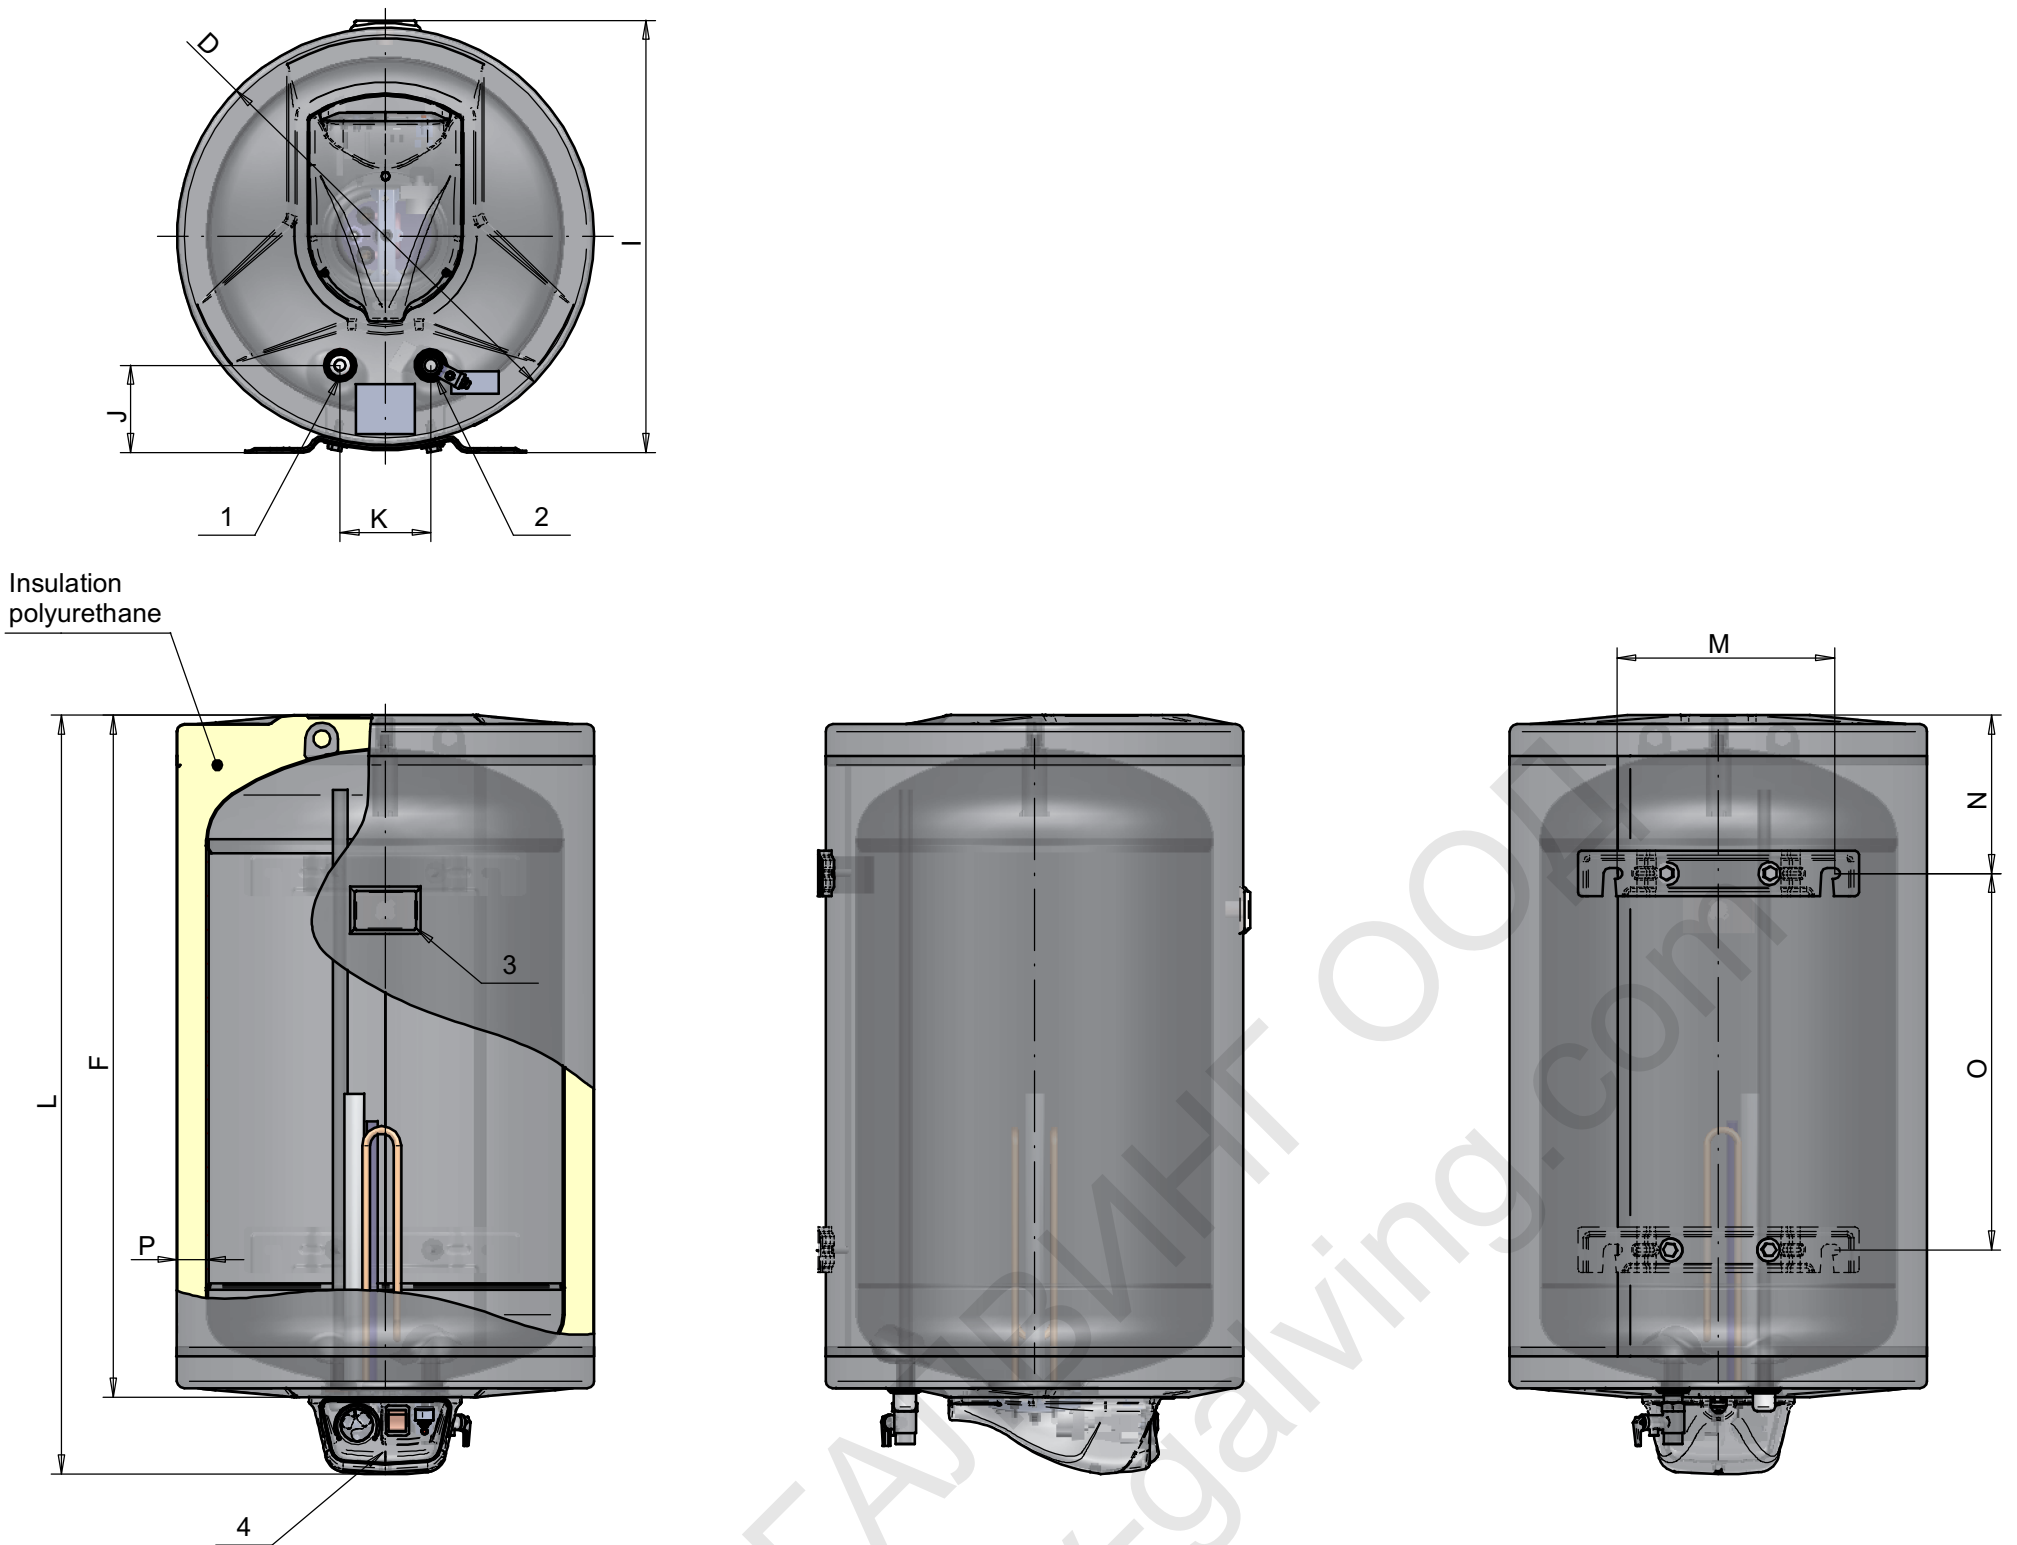

Wall mounting water heaters	Enameled		72269	72267	72268	72265	72270	72266	72280M	72280	72281
	Stainless			72267H	72268H	72265H		72266H		72280H	72281H
CHARACTERISTICS											
Rated volume		L	30	50	80	80	100	120	150	150	200
Rated voltage		V	220-230~			220-230~				220-230~	
Rated electrical power		kW	1,5	2	3	3				3	
Rated presure		bar	6			6				6	
Maximum D.H.W. tank temperature in		°C	75			75				75	
Weight when empty	Enameled	kg	15	20,5	27	27	31	34	44	48	60
	Stainless			17	22.5	22,5		30		42	53,5
CONNECTIONS											
1: Hot water outlet		"GAS/M	1/2								
2: Fresh water inlet (Drain) Safety valve		"GAS/M	1/2								
3: Temperature indicator		-	-								
4: Control panel		-	-								
DIMENSIONS											
Level D		mm	n 385			n 460				n 586	
Level F		mm	470	665	980	740	915	1080	1330	930	1170
Level I		mm	400			474				600	
Level J		mm	80			96				105	
Level K		mm	100			100				100	
Level L		mm	555	750	1065	825	1000	1165	1415	1015	1255
Level M		mm	240			240				240	
Level N		mm	144			175				190	
Level O		mm	-	-	-	-	-	-	1003	560	780
Level P		mm	32			32				43	