

Fig.1

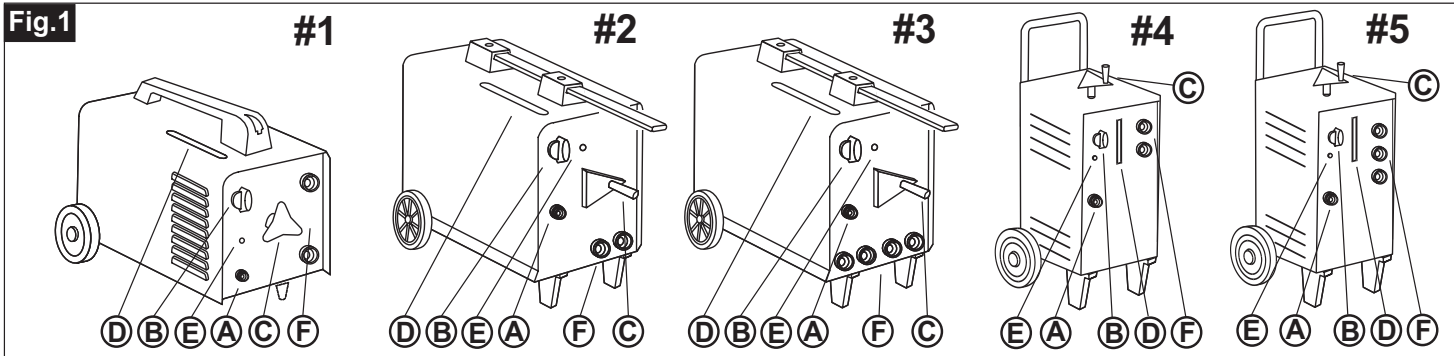


Fig.2

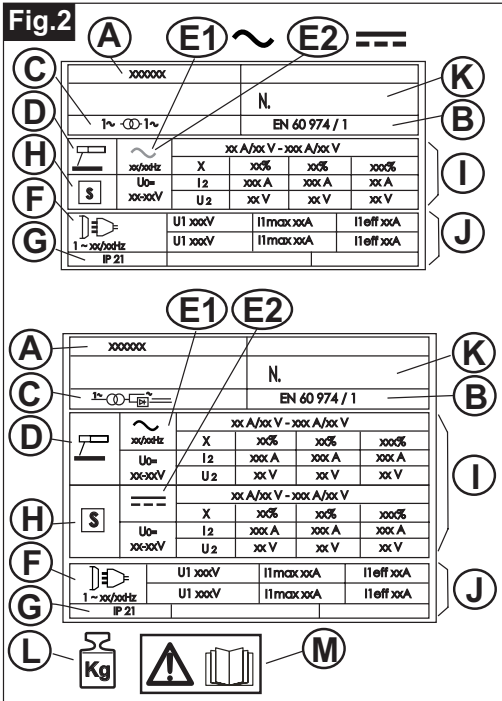
**Fig.2,b**

Fig.2,b

	NORMAL USE AT 20° c 1h				
S	xx A/xx V +/-10%				
T	$\frac{1}{2}$ - Ø mm	1,6	2,0	2,5	3,2
U	I2(A)	XX	XX	XX	XX
V	X	XX%	XX%	XX%	XX%
Z	N° - 1h	XX	XX	XX	XX

Fig.3

Fig.3									
		(3,1)			(3,2)			(3,3)	(3,4)
1Ph									Zmax**
I ₂ max (A)	110V	220V	380V	110V	220V	380V			
	115V	230V	400V	115V	230V	400V			
	120V	240V	415V	120V	240V	415V			
							Mm ²	ohm	
110	T20A	T16A		20A	16A		10		0,356
140	T32A	T20A	T16A	32A	16A	16A	10		0,269
160		T20A	T16A		16A	16A	16		0,257
180			T16A		16A	16A	16		0,257
200		T25A	T20A		32A	16A	16		0,266
250	T32A	T25A	T25A	32A	32A	16A	16		0,171
250*	T50A	T25A	T25A	50A	32A	16A	25		0,130

** Zmax 1Ph 230 V

19

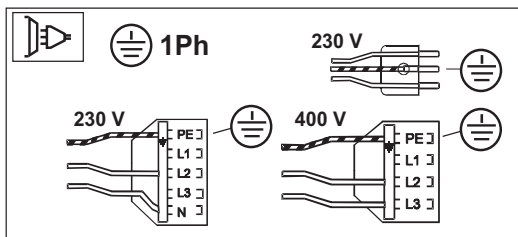


Fig.4

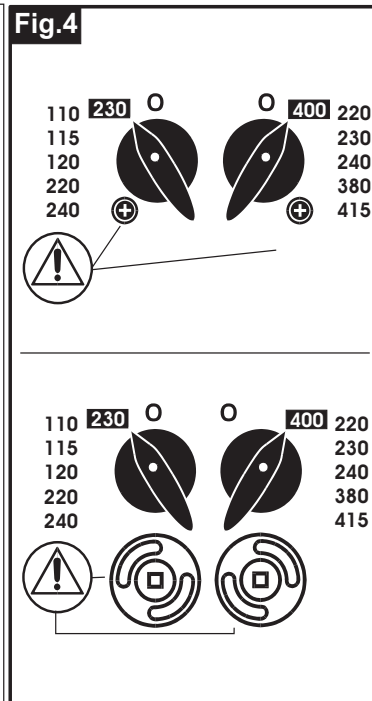


Fig.5

Fig.5

 mm.	Ø mm.	AMP
1,0	1,6	30 - 50
2,0 - 3,5	2,0	50 - 75
2,5 - 3,0	2,5	75 - 105
3,0 - 4,0	3,2	105 - 140
4,0 - 5,0	4,0	130 - 180

Fig.6

