





GlueMatic 1007-LT / Type: 3291 GlueMatic 1007 / Type: 3292



## GlueMatic 1007




GlueMatic 1007-LT




GlueMatic 1007-LT



GlueMatic 1007

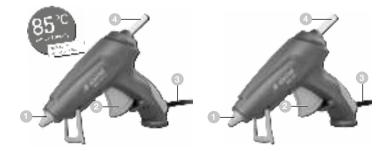

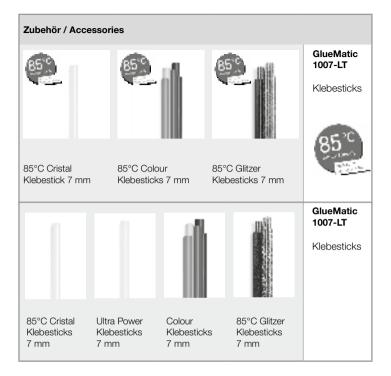

## Die GlueMatic 1007-LT darf nur mit den dazu passenden 85°C Klebesticks in Betrieb genommen werden

## **Technical specifications**

	GlueMatic 1007-LT	GlueMatic 1007
Warm-up time:	8 min	<6 min
Melting temperature:	85°C	170°C
Delivery rate:	4 g/min	5 g/min
Dimensions ( $L \times W \times H$ ):	145 × 35 × 145 mm	145 × 35 × 145 mm
Power supply:	220 – 240 V, 50/60 Hz (variable without change-over)	220 – 240 V, 50/60 Hz (variable without change-over)
Rated power:	8 W	10 W
Weight:	185 g	185 g
Glue sticks:	Genuine STEINEL 85 °C glue sticks	Genuine STEINEL and Henkel glue sticks

Subject to technical modifications

## Manufacturer's warranty

This STEINEL product has been manufactured with utmost care, tested for proper operation and safety and then subjected to random sample inspection. STEINEL guarantees that it is in perfect condition and proper working order.

The warranty period is 36 months and starts on the date of sale to the consumer. We will remedy defects caused by material flaws or manufacturing faults. The warranty will be met by repair or replacement of defective parts at our own discretion. If this tool's connection lead is damaged, it must only be replaced by a repair workshop specified by the manufacturer. The warranty shall not cover damage to wear parts, damage or defects caused by improper treatment or maintenance. Further consequential damage to other objects shall be excluded.

Claims under the warranty will only be accepted if the unit is sent fully assembled and well-packed with a brief description of the fault, a receipt or invoice (date of purchase and dealer's stamp) to the appropriate Service Centre.

