
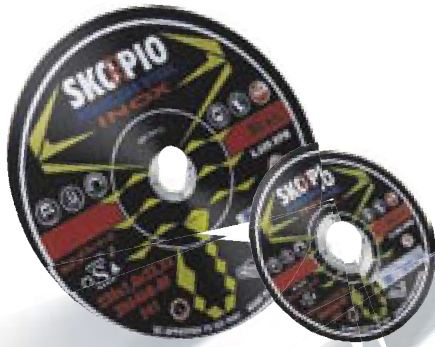


## THIN CUTTING-OFF WHEELS



Standard quality cutting-off wheels are intended for general applications in the cutting of various materials, taking into account the optimal ratio of cutting effect to product price.

QUALITY	MATERIAL	QUALITY CLASS
A60T-BF, A46T-BF	Steel, metals	Standard
20A60S-BF, 20A46S-BF	Stainless steel, steel, metals	Standard
C60S-BF, C46S-BF	Stone, concrete	Standard

Type	Dimensions D x T x H mm	Peripheral speed m/s	Rpm 1/min	Grit size	Packaging units
F41	100 x 1 x 16	80	15300	60	25
F41	115 x 1 x 22.23		13300		
F41	125 x 1 x 22.23		12250		
F41	100 x 1.2 x 16		15300	46	
F41	115 x 1.2 x 22.23		13300		
F41	125 x 1.2 x 22.23		12250		
F41	100 x 1.6 x 16		15300		
F41	115 x 1.6 x 22.23		13300		
F41	125 x 1.6 x 22.23		12250		
F41	150 x 1.6 x 22.23		10200		
F41	178 x 1.6 x 22.23		8500		
F41	230 x 1.6 x 22.23		6650		
F41	150 x 1.8 x 22.23		10200		
F41	178 x 1.8 x 22.23		8500		
F41	230 x 1.8 x 22.23		6650		
F41	250 x 1.8 x 22.23		6150		

F41 type cutting-off wheels are also available with the following bores:

D = 100 mm

H = 10 mm

D = 230, 250 mm

H = 16 mm

