

REMS dry diamond core drilling crowns LS

For REMS Picus DP, REMS Picus DWP and other makes

High quality dry diamond core drilling crowns. Laser welded. Especially for dry drilling with core drilling machines with micro-pulse technology, e.g. REMS Picus DP, REMS Picus DWP, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material.

Concrete, steel-reinforced concrete, aggregate concrete, brick, clinker, all kinds of masonry, natural stone, asphalt, all kinds of screed and other Ø 32–202 mm

REMS dry diamond core drilling crowns LS – Laser welded, high temperature-resistant. Especially for dry drilling with core drilling machines with micro-pulse technology. Versatile for many types of material. Ideal for plumbers.

Universally usable for many materials, hand held or with drill stand.

Single connecting thread UNC 1¼ female. Drilling depth 320 mm.


Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.

Diamond segments with diamonds positioned in the bonding agent. For fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory.

Driven by a REMS Picus DP and REMS Picus DWP drive unit and suitable drive units of other makes with UNC 1¼ outer connecting thread. Also suitable for wet drilling.


Use REMS Pull 2 M for high-performance extraction of drilling dusts from the drilling gap during dry drilling (page 344). The REMS Pull 2 M safety vacuum cleaner is certified for extracting health hazardous dusts of dust class M.

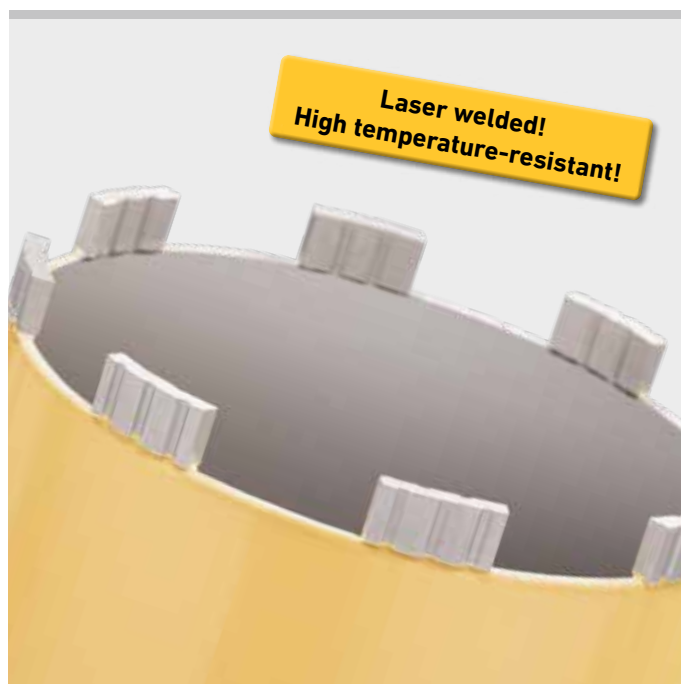

Supply format

REMS dry diamond core drilling crowns LS. Laser welded, high temperature-resistant. Especially for dry drilling with core drilling machines with micro-pulse technology, e.g. REMS Picus DP, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1¼ female. Drilling depth 320 mm. In a carton.

Ø × drilling depth × connection	Number of segments	Art.-No.	лв.
TDKB LS 32 × 320 × UNC 1¼	3	181500R	347,00
TDKB LS 42 × 320 × UNC 1¼	4	181502R	325,00
TDKB LS 52 × 320 × UNC 1¼	5	181504R	346,00
TDKB LS 62 × 320 × UNC 1¼	5	181506R	377,00
TDKB LS 72 × 320 × UNC 1¼	6	181508R	427,00
TDKB LS 82 × 320 × UNC 1¼	6	181510R	462,00
TDKB LS 92 × 320 × UNC 1¼	6	181512R	530,00
TDKB LS 102 × 320 × UNC 1¼	7	181514R	540,00
TDKB LS 112 × 320 × UNC 1¼	7	181516R	570,00
TDKB LS 122 × 320 × UNC 1¼	8	181532R	650,00
TDKB LS 127 × 320 × UNC 1¼	8	181518R	670,00
TDKB LS 132 × 320 × UNC 1¼	8	181520R	690,00
TDKB LS 142 × 320 × UNC 1¼	8	181522R	740,00
TDKB LS 152 × 320 × UNC 1¼	8	181524R	820,00
TDKB LS 162 × 320 × UNC 1¼	9	181526R	870,00
TDKB LS 182 × 320 × UNC 1¼	9	181528R	960,00
TDKB LS 202 × 320 × UNC 1¼	10	181530R	1 020,00

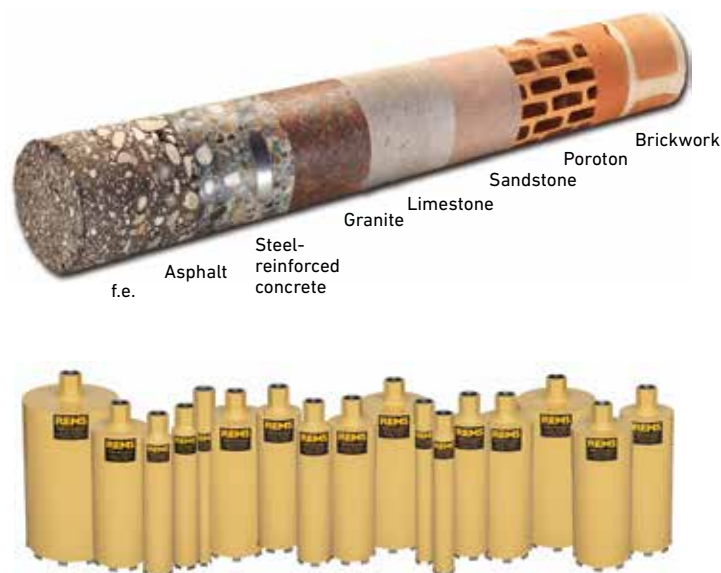

Accessories

Description	Art.-No.	лв.
Light loosening ring , for light loosening of the diamond core crown	180015	41,90
Drilling crown extension 200 mm	180155R	124,00
Sharpening stone for diamond core drilling crowns	079012	132,00
Single open ended wrench size 41 for UDKB	079003	77,70

Dust protection doors, see page 120.

Additional adapters for using REMS dry diamond core drilling crowns LS in drive machines of other makes, on request.

