



Chalk Spray Paint (V404)

A spray paint which is VOC free, odorless, but extremely resistant the same time? Impossible you say? Not for Ambro-Sol!

CHALK PAINT - Water based paint with a ultra matt finish effect, suitable for both indoor and outdoor use. It's ideal for decorating any common surface such as metal, plastic, glass, ceramic etc. especially suitable for turning your old wood furniture into a vintage/modern piece of art. Fast drying finish, low VOC. After your application, when the paint is dry, It is advisable to add wax or transparent varnish which provides that protective layer on your newly modified piece.



Product under V.O.C. regulation
Sub-category: Special Finish
Edge value of VOC: 840 g/L

APPLICATION:
wood, metal, plastic.

Technical Specifications:

Quantity	400 ml
Box / Case	6 Pcs.
Aspect	Pressurized liquid can
Chemical Nature	Water based acrylic paint
Color	Various – see color card
Odor	Lightly aromatic
Relative density	at 20°C 0,76 ÷ 0,80 g/ml
Flash Point	Extremely flammable < 0° C
Writing underneath the can	Barcode, batch date, product name
Pressure	at 20°C 5,0 ± 0,5 bar
Viscosity Ford Cup	4500 – 5500 mPa.s A4 – V20 (liquid base)
Dry Residual inside the Can	>50%
Gloss	5-15 Gloss (glossmeter angle 60°)
Thickness 1 layer	around 13 Micron
Thickness 3 layers	around 36 Micron
Working Temperature	+10°C / +100°C (spikes of 120° C)
Drying time t=20°:	Out Dust 60 minuti
	On touch 90 minuti
	In depth 36 ore
Child-proof safety cap	
Colored Token & Ring	
Can suitable for different nozzles	

FOR A PROFESSIONAL RESULT, CAREFULLY CLEAN AND SAND THE SURFACE FOR A BETTER ADHESION, THEN APPLY THE DESIRED COLOR.


IT IS RECOMMENDED TO USE THE PRODUCT AT A TEMPERATURE AROUND 20/25 ° C, AND A HUMIDITY RATE NOT MORE THAN 60%.

AFTER THE APPLICATION OF THE COLOR, WE RECOMMEND TO USE A PROTECTIVE WAX (V404CP) OR A TRANSPARENT VARNISH(V404TF) FOR A LASTING EFFECT AND TO EASE WASHING DIRT OFF

BEING A DECORATIVE PRODUCT, THE FINAL RESULT IS MOSTLY DEPENDING ON THE USER'S MANUAL ABILITY

HOW TO USE:


- Vigorously shake the can for at least 1 minute, until you hear the inner marbles move freely. It is also suggested to occasionally shake the cylinder even during use;
- Carefully clean the surface before application;
- Test in a hidden area to verify compatibility of the surface with the paint.

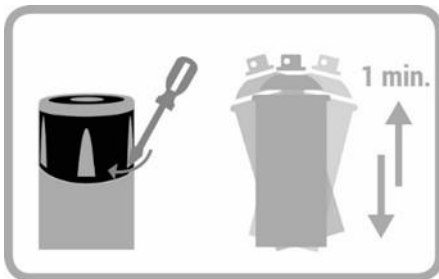

Remove the secure seal on the cap, to open the spray



**EROGATORE PRODOTTI
VERNICIANTI NERO/BIANCO**
BLACK/WHITE PAINTING
PRODUCTS ACTUATOR

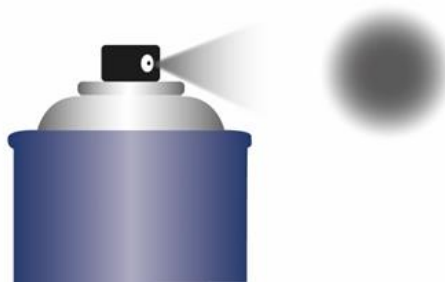

- **Erogazione:Lineare**
Dispensing:Linear
- **Quantità prodotto erogato:Media**
Quantity product dispensed:Medium
- **Tipo di erogazione:Cono medio**
Dispensing type:Medium cone
- **Tipo di spruzzo:Nebulizzato**
Spray type:Nebulized

SPRAY:

- Apply a first hand / coat light to improve coverage and adherence, to reduce the possibility of dropping. Apply from a distance of 20-30 cm;
- After a few moments apply a second horizontal hand/coat immediately followed by a third vertical hand / coat;
- Let dry a few minutes;
- After use, it's advisable to spray for 2/3 seconds with the spray upside down, to avoid the block of the actuator;
- After 24h, proceed with the normal use of painted piece.

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 10°C and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months (warranty). The product doesn't expire.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before using, the users should verify the suitability of the product for its specific use.

BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT