



Iron Mica Effect enamel 400 ml (V400MIC)

This spray is ideal for painting indoor and outdoor surfaces. The particular finish gives to the appearance of typical effect of iron. Applicable on metals of any kind. Medium grain finish.

IRON MICA EFFECT ENAMEL - It's the enamel with antiquing effect for internal and external, based on lamellar micaceous iron-oxide, particularly suitable for the protection from the elements and the decoration of internal and external furnishing. The use of special corrosion inhibitors and the possibility of applying high thicknesses, allow to obtain excellent protection over time. It dries to the touch in roughly 15 minutes and dries fully in roughly 24 hours. Application: metal and wood surface, plaster, doors, railings, gates, metal grates, metal cabinets, flashings, furniture, garden furniture.



Directive 2004/42/CE: C.O.V.
Under category: Special finishing
Limit value COV: 840 g/Liter

FIELDS OF APPLICATION:

Metal surfaces as iron, aluminum, steel.


Technical specifications:

Quantity	400 ml
Box / Case	6 Pz.
Aspect	Tin-Plate can containing under pressure fluid
Chemical nature	Quick drying acrylic paints
Colour	Various
Odour	Characteristic of solvent
Relative density	At 20°C 0,73 ÷ 0,77 g/ml
Flash point	Und. 0° C extremely flammable
Writing on spray bottom	Barcode, batch date, product name
Pressure	at 20°C 5,5 ± 0,5 bar
Pressure	at 50°C 8,0 ± 0,5 bar
Viscosity Ford cup	From 10" to 13"
Dry residual in spray	45%
Granulometry	Bottom Scale 0 a 2 Micron
Gloss	5 - 10 Gloss (Glossmeter angle 60°)
Thickness hand	13-24 Micron
Thickness hands	36-54 Micron
Resistance temperature	-10°C / +130°C (Peak 150° C)
Drying times:	Out dust 10 minutes
	Dry to touch 15 minutes
	Dry in depth 22 hours
Security cap child-proof patented	
Token and ring colored	
Is possible have different type of actuators for various effects and employ	
Check the color and/or product type on the cap or the bottom of the can.	

FOR A PROFESSIONAL RESULT, CLEAN ACCURACY THE WORKPIECE BEFORE THE PAINTING. IT'S ADVISABLE TO USE THE PRODUCT TO A TEMPERATURE OF 20°C – 30°C. ATTENTION, PRODUCT AT HIGH VISCOSITY.

HOW TO USE:

- Vigorously shake the can for at least 1 minute, until you hear the inner marbles move freely. It is also suggested to occasionally shake the cylinder even during use;
- Carefully clean the surface before application;
- Test in a hidden area to verify compatibility of the surface with the paint.

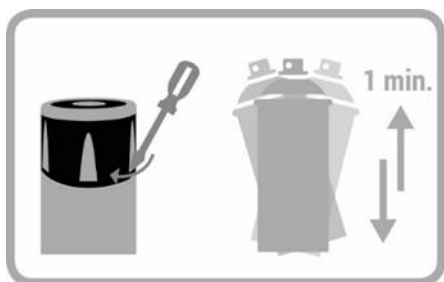


Remove the secure seal on the cap, to open the spray



**EROGATORE PRODOTTI
VERNICIANTI BIANCO/ROSA**

**WHITE/ROSE PAINTING
PRODUCTS ACTUATOR**

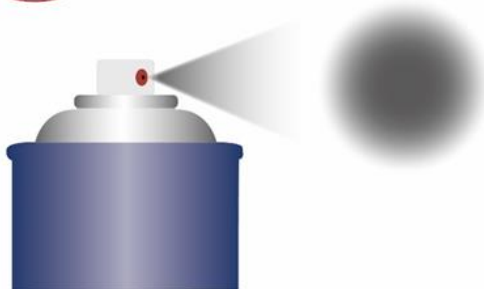

- **Erogazione:Lineare**
Dispensing:Linear
- **Quantità prodotto erogato:Super Abbondante**
Quantity product dispensed:Super Plentiful
- **Tipo di erogazione:Cono largo**
Dispensing type:Large cone
- **Tipo di spruzzo:Nebulizzato**
Spray type:Nebulized

SPRAY:

- Apply a first hand / coat light to improve coverage and adherence, to reduce the possibility of dropping. Apply from a distance of 20-30 cm;
- After a few moments apply a second horizontal hand/coat immediately followed by a third vertical hand / coat;
- Let dry a few minutes;
- After use, it's advisable to spray for 2/3 seconds with the spray upside down, to avoid the block of the actuator;
- After 24h, proceed with the normal use of painted piece.

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 5°C and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months (warranty). The product doesn't expire.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before using, the users should verify the suitability of the product for its specific use.

BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT