



Wood Stain Spray (V407)

WOOD STAIN: wood stain formulated for deep penetration and long lasting protection. Made for interiors and exteriors, it suitable for protection of wooden products such as fixtures, matchboards, boats, garden furniture, and more. It effectively protects the wood from aggressive atmospheric conditions such as sun (UV rays) and water. It guarantees easy maintenance, even after long periods of time from the original application. It can be painted over or left as clean sheen allowing the natural grains and knots of the wood to be more visible and profound.

Technical Specifications:



Quantity	400 ml
Box / Case	6 Pc.
Aspect	Tin-Plate can containing under pressure fluid
Chemical nature	Alkyd resin
Colour	Transparent, White, Dark Walnut, Light Walnut, Teak, Oak.
Odour	Characteristic
Relative Density	at 20°C 0,71 ÷ 0,75 g/ml
Flash point	Und. 0° C extremely flammable
Writing on bottom can	Barcode, batch date, product name
Pressure	at 20°C 5,5 ± 0,5 bar
Pressure	at 50°C 8,0 ± 0,5 bar
Viscosity Ford Cup	at 20°C From 15" to 20"
Dry residual in spray	From 40% to 50%
Drying time at 20°C	Dry to touch: 180 minutes (1 coat)
	Dry in depth: 12 hours
Yield	1-2 m ² (depending on the absorption of the wood, the number of coats and the sensitivity of the operator)
Security cap child-proof patented and registered	
Token and ring with color reference (the colour is indicative)	

Product subject to directive C.O.V.
Subcategory: Special finishes
Limit value COV: 840 g/liter

FIELDS APPLICATION:

Wood surfaces

Ready-to-use product on raw and untreated wood. In case of previous treatments, sand and clean the surface to remove any residues.


To obtain a perfect result and increase absorption, we recommend dabbing the surface of the wood with a soft and dry cloth after application.

The application of two coats is recommended on untreated or porous wood. With each additional coat the color of the wood may darken further. The final result may vary based on the color and the characteristic absorption of the type of wood.

The use of the transparent wood stain (V407TR) is recommended as a first coat.

HOW TO USE:


- Vigorously shake the can for at least 1 minute, until you hear the inner marbles move freely. It is also suggested to occasionally shake the can even during use;
- Carefully sand and clean the surface before application;
- Test in a hidden area to check the effect on the surface.

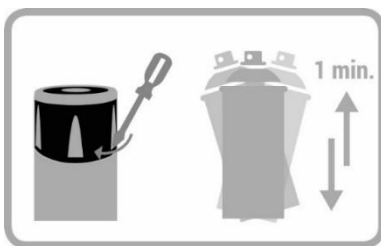

Remove the secure seal on the cap, to open the spray



WHITE/YELLOW PAINTING
PRODUCTS ACTUATOR



Dispensing: Linear

Quantity product dispensed: Medium/Plentiful

Dispensing type: Medium cone

Spray type: Nebulized

SPRAY:

- Spray from a distance of 20-30 cm;
- Apply each coat through a series of vertical passages followed immediately by horizontal passages;
- Let dry for as long as necessary;
- After every break use, it's necessary to spray for 2/3 seconds with the can upside down, to avoid the block of the nozzle;
- After 12 hours, proceed with the normal use of treated piece.

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 5°C and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months (warranty). The product doesn't expire.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before using, the users should verify the suitability of the product for its specific use.

BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT