


DIN 912

DIN 912 - Винт с цилиндрична глава вътр. шестостен

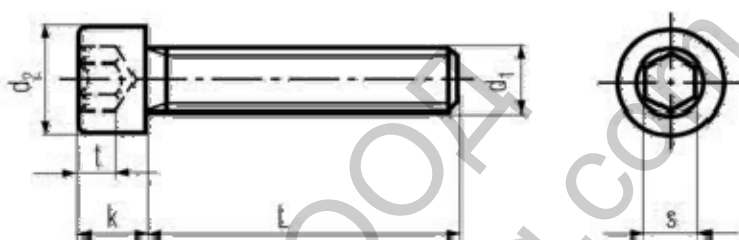

Всички размери са в милиметри (mm)

| d_1 | $t \text{ min}$ | s | $k \text{ max}$ | d_2 |
|-------|-----------------|-----|-----------------|-------|
| M2 | 1 | 1.5 | 2 | 3.8 |
| M3 | 1.3 | 2.5 | 3 | 5.5 |
| M4 | 2 | 3 | 4 | 7 |
| M5 | 2.5 | 4 | 5 | 8.5 |
| M6 | 3 | 5 | 6 | 10 |
| M8 | 4 | 6 | 8 | 13 |
| M10 | 5 | 8 | 10 | 16 |
| M12 | 6 | 10 | 12 | 18 |
| M14 | 7 | 12 | 14 | 21 |
| M16 | 8 | 14 | 16 | 24 |
| M18 | 9 | 14 | 18 | 27 |
| M20 | 10 | 17 | 20 | 30 |
| M24 | 12 | 19 | 24 | 36 |
| M27 | 13.5 | 19 | 27 | 40 |
| M30 | 15.5 | 22 | 30 | 45 |
| M36 | 19 | 27 | 36 | 54 |