


Болт машинен, с 6-стенна глава, с цяла резба 10.9, DIN 961

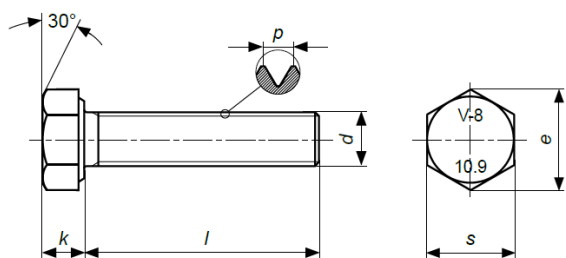

DISPONIBILI: Brunito - Zincato bianco o Zincato giallo deidrogenato secondo RoHS
Altri trattamenti a richiesta
AVAILABLE: Black - White zinc plated or Yellow zinc plated with dehydrogenation
according to RoHS - Other coatings on request

| ISO (8676*) | UNI 5740 | DIN 961 |
|---|---------------------------|---------------------------|
| MATERIALE MATERIAL | | ACCIAIO STEEL |
| PROPRIETÀ MECCANICHE MECHANICAL PROPERTIES | | SECONDO ACCORDING TO |
| | | ISO 898 - 1 |
| CLASSE CLASS | | 10.9 |
| TOLLERANZE TOLLERANCES | | SECONDO ACCORDING TO |
| | | ISO 4759-1 CAT A - B** |

| d | M10 | M12 | M14 | M16 | M18 | M20 | M24 | M27 |
|-------|------|------|-------|-------|-------|-------|-------|------|
| p | 1,25 | 1,25 | 1,5 | 1,5 | 1,5 | 1,5 | 2 | 2 |
| s | 17 | 19 | 22 | 24 | 27 | 30 | 36 | 41 |
| k | 6,4 | 7,5 | 8,8 | 10 | 11,5 | 12,5 | 15,2 | 17,3 |
| e min | 18,9 | 21,1 | 24,48 | 26,75 | 30,14 | 35,53 | 39,98 | 45,2 |

| l | Kg | | | | | | | | |
|--------------------|-----|------|-------|-----|-----|-----|-----|-----|-----|
| LUNGHEZZA / LENGTH | 20 | | 32,9 | | | | | | |
| | 22 | | | | | | | | |
| | 25 | 26,2 | 36,6 | 54 | 72 | | | | |
| | 30 | 28,9 | 40,3 | 59 | 79 | | | | |
| | 35 | 31,6 | 44,0 | 64 | 85 | 116 | | | |
| | 40 | 34,3 | 47,7 | 70 | 92 | 124 | | | |
| | 45 | 36,9 | 51,4 | 75 | 99 | 133 | | | |
| | 50 | 39,6 | 55,0 | 80 | 106 | 142 | | 287 | |
| | 55 | | | 85 | 113 | 151 | | 303 | |
| | 60 | 45,1 | 62,4 | 91 | 120 | 160 | 207 | 319 | |
| | 65 | | | 96 | 127 | 168 | | 336 | |
| | 70 | | 70,0 | 101 | 134 | 177 | 228 | | |
| | 75 | | | 106 | 141 | 185 | | | |
| | 80 | | 77,4 | 111 | 148 | 195 | 251 | | 507 |
| | 90 | | 84,8 | | 162 | 212 | 272 | | 547 |
| | 100 | | 92,2 | | 176 | 229 | 295 | | 587 |
| | 110 | | 99,2 | | 190 | | 317 | | |
| | 120 | | 107,0 | | 204 | | 339 | | |
| | 130 | | | | 218 | | 361 | | |

Kg PESO PER 1000 PEZZI / WEIGHT FOR 1000 PCS