


# DIN 912

DIN 912 - Винт с цилиндрична глава вътр. шестостен

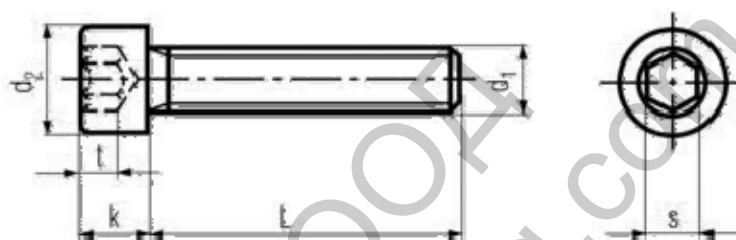

\*Всички размери са в милиметри (mm)\*

| <b>d<sub>1</sub></b> | <b>t min</b> | <b>s</b> | <b>k max</b> | <b>d<sub>2</sub></b> |
|----------------------|--------------|----------|--------------|----------------------|
| M2                   | 1            | 1.5      | 2            | 3.8                  |
| M3                   | 1.3          | 2.5      | 3            | 5.5                  |
| M4                   | 2            | 3        | 4            | 7                    |
| M5                   | 2.5          | 4        | 5            | 8.5                  |
| M6                   | 3            | 5        | 6            | 10                   |
| M8                   | 4            | 6        | 8            | 13                   |
| M10                  | 5            | 8        | 10           | 16                   |
| M12                  | 6            | 10       | 12           | 18                   |
| M14                  | 7            | 12       | 14           | 21                   |
| M16                  | 8            | 14       | 16           | 24                   |
| M18                  | 9            | 14       | 18           | 27                   |
| M20                  | 10           | 17       | 20           | 30                   |
| M24                  | 12           | 19       | 24           | 36                   |
| M27                  | 13.5         | 19       | 27           | 40                   |
| M30                  | 15.5         | 22       | 30           | 45                   |
| M36                  | 19           | 27       | 36           | 54                   |