



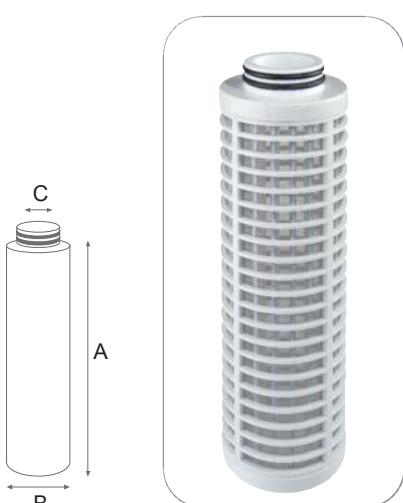

RLA stainless steel washable net AISI 316

Sediment filtration.
Average life-span: 2 - 3 years.
Maintenance: wash every month at least.

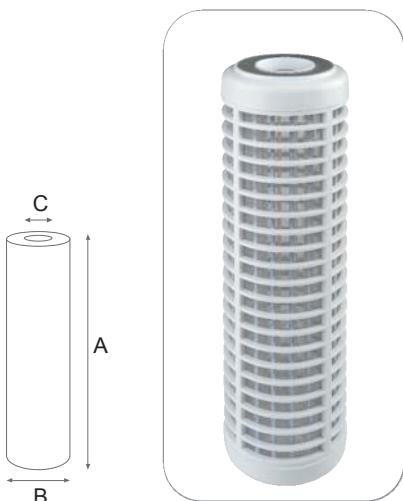

WORKING CONDITIONS

Max working temperature _____ 45°C (113°F)
Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
Filter medium: stainless steel net AISI 316.
Armouring and end caps: polypropylene.
Flat seals SX: SEBS with antimicrobial technology.
O-rings BX and CX: EPDM.

Cartridges with stainless steel net and plastic frame, with consistent water flow and very low pressure drop, filtration at 70 micron. The cartridges are manufactured without glue and sealants, nets are included while molding the structural frame. Available with height 10" and 20".

RLA SX

STAINLESS STEEL AISI 316 WASHABLE NET WITH DOUBLE OPEN END (DOE)

CODE	MODEL	NOMINAL HEIGHT	NOMINAL FILTRATION MICRON	RECOMMENDED FLOW RATE l/h	DIMENSIONS MM		
OD 2,40" x ID 1,10"					A	B	C
RA5465119	RLA 10 SX70 mcr	10"	70	2500	250	70	30
RA5467119	RLA 20 SX70 mcr	20"	70	4000	505	70	30

RLA BX

STAINLESS STEEL AISI 316 WASHABLE NET WITH DOUBLE O-RING COLLAR 45 MM

CODE	MODEL	NOMINAL HEIGHT	NOMINAL FILTRATION MICRON	RECOMMENDED FLOW RATE l/h	DIMENSIONS MM		
OD 2,40" x ID 1,10"					A	B	C
RA5465219	RLA 10 BX70 mcr	10"	70	2500	250	70	30
RA5467219	RLA 20 BX70 mcr	20"	70	4000	505	70	30

RLA CX

STAINLESS STEEL AISI 316 WASHABLE NET WITH DOUBLE O-RING COLLAR 57 MM

CODE	MODEL	NOMINAL HEIGHT	NOMINAL FILTRATION MICRON	RECOMMENDED FLOW RATE l/h	DIMENSIONS MM		
OD 2,40" x ID 1,10"					A	B	C
RA5465319	RLA 10 CX70 mcr	10"	70	2500	250	70	40
RA5467319	RLA 20 CX70 mcr	20"	70	4000	505	70	40

RLA are available in a variety of:

CONFIGURATIONS:

- SX standard configuration double open end (DOE) available for every height and diameter.
- BX proprietary configuration with double o-ring collar 45 mm, suitable to PLUS 3P BX housings, DP housings, K DP housings.
- CX proprietary configuration with double o-ring collar 57 mm, suitable to PLUS 3P CX, K DP housings.

MODELS:

- RLA series from 10" to 20" OD 2,40" ID 1,10", SX, BX, CX configurations.

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- RLA series at 30" and 40".

CERTIFICATIONS



RLA cartridges are tested and certified under the most stringent procedures worldwide, in compliance with DM 25 (Italy) and GOST (Russia).

FLOW RATE vs PRESSURE DROP Δp

Tests carried on 10" elements type RLA 10 SX.
Testing mode: 20°C, 3 BAR

70 micron

