


Вентил Сете електромагнитен за газ 6 мм



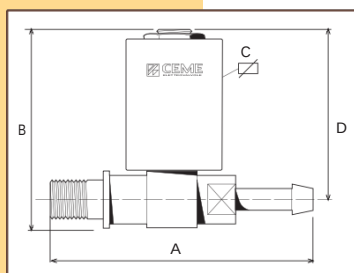

CARATTERISTICHE SPECIFICATIONS

ATTACCHI PIPES in → out	Ø mm	CODICE CODE	KV m ³ /h	M.O.P.D. bar AC DC	DIMENSIONI/DIMENSIONS mm				PESO/WEIGHT Kg
1/8 NPT	1,5	5503	0,065	17 8	31	48	40	41	0.105
(*)	2,0	5504	0,090	13 7	66	54	40	41	0.130
1/4 NPT	1,5	5505	0,065	17 8	38	56	40	42	0.100
G 1/8	2,8	5509	0,160	7 2	31	56	40	41	0.100
G 1/8	1,5	5510	0,065	17 8	31	54	40	41	0.100
G 1/8	2,0	5510	0,090	13 7	31	54	40	41	0.100
G 1/8	2,5	5510	0,150	9 2	31	54	40	41	0.100
G 1/8	2,7	5510	0,160	8 2	31	54	40	41	0.100
G 1/8	3,3	5510	0,190	4 1	31	54	40	41	0.100
G 1/8	1,5	5511	0,065	17 8	31	48	40	41	0.100
G 1/8	2,0	5511	0,090	13 7	31	48	40	41	0.100
G 1/8	2,7	5511	0,160	8 2	31	48	40	41	0.100
G 1/8	3,3	5511	0,190	4 1	31	48	40	41	0.100
G 1/4	1,5	5512	0,065	17 8	38	56	40	42	0.120
G 1/4	2,0	5512	0,090	13 7	38	56	40	42	0.120
(*)	2,0	5522	0,090	13 7	49	45	40	39	0.105
(*)	2,7	5522	0,160	8 2	49	45	40	39	0.105
(*)	2,0	5523	0,090	13 7	35	44	40	39	0.090
(*)	2,0	5524	0,090	13 7	35	44	40	39	0.090
(*)	2,0	5525	0,090	13 7	32	61	40	39	0.090
(*)	2,0	5532	0,090	13 7	63	54	40	41	0.125
(*)	2,2	5534	0,105	10 3	56	54	40	44	0.125
(*)	2,0	5535	0,090	13 7	70	51	40	41	0.130
(*)	2,0	5536	0,090	13 7	66	54	40	41	0.130
G 1/8	2,0	5537	0,090	13 7	26	51	40	43.5	0.110
G 1/8	2,5	5537	0,150	9 2	26	48	40	41	0.110
G 1/8	2,0	5540	0,090	13 7	39	54	40	41	0.110
(*)	1,5	5541	0,065	17 8	58.5	51	40	41	0.125
(*)	2,0	5541	0,090	13 7	58.5	51	40	41	0.125
G 1/8 - M8x1	2,0	5543	0,090	13 7	31	54	40	41	0.105
1/8 NPT	2,0	5545	0,090	13 7	26	48	40	41	0.110
1/8 NPT	3,0	5545	0,175	5 1	26	48	40	41	0.110
1/8 NPT	2,0	5546	0,090	13 7	26	51	40	43.5	0.105
(*)	2,3	5572	0,090	10 3	70	47	40	40	0.130
(*)	2,3	5573	0,090	10 3	70	47	40	40	0.130
G 1/8 - M8x1	2,0	5584	0,090	13 7	79	56	40	43	0.150

(*) VED. TABELLA ATTACCHI PORTAGOMMA /
SEE SCHEDULE "HOSE BIB CONNECTION" /
SIEHE TABELLE "SCHLAUCHNIPPELANSCHLUSS"

CARATTERISTICHE ELETTRICHE

ELECTRICAL INFORMATION

POTENZA/POWER			
NOMINALE HOLDING	SPUNTO IN RUSH		
V~ 12 24 48 110 230 400	50 60 Hz	11VA	15VA
V= 12 24 48 110		9W	

Per dettagli costruttivi sulle bobine vedi capitolo "INFORMAZIONI DI PROGETTO"
For construction details of the coils see chapter "PROJECT INFORMATION"
Ausführliche Daten über die Ventilsolen finden Sie unter Abschnitt "TECHNISCHE INFORMATIONEN"

MAX TEMPERATURA	MAX TEMPERATURE		
FLUIDI/FLUIDS	AMBIENTE/AMBIENT		

NBR	EPDM	FPM	HNBR	80°C
90°C	140°C	140°C	110°C	

Disponibili bobine per temperature ambienti fino a 120°C
Coils available for ambient temperatures up to 120°C
Spulen verfügbar für Umgebungstemperaturen bis zu 120°C

ATTACCHI PORTAGOMME HOSEBIB PIPES

CODE	IN	OUT	IN	OUT
5504	PG	PG		
5522				
5523 5524 5525	R 1/8"	PG		
5532	PG	PG		
5534	1/4"	PG		
5535	PG/M12x1	M12x1/PG		
5536	PG	PG		
5541	1/4"	PG		

5572

5573 PG PG

Продукт: [Вентил Семе електромагнитен за газ 6 мм](#)

Категория: [Електродъгово заваряване](#)

Бранд: [Семе](#)

Категория бранд: [Вентил Семе](#)