

REMS RAS Cu-INOX – the compact version with telescopic spindle.

Telescopic spindle. Easy, quick adjustment in both directions.

Compact design for tough use.

Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.


Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX 3–35 S with needle bearing cutting wheel and needle bearing counter-pressure rollers for very easy cutting.

Integrated pipe deburring device, on rotating bearing, adapts to the workpiece edge to be deburred.

Specially hardened and ground universal deburring blade guarantees easy deburring and extremely long life.

Fast, simple blade change.

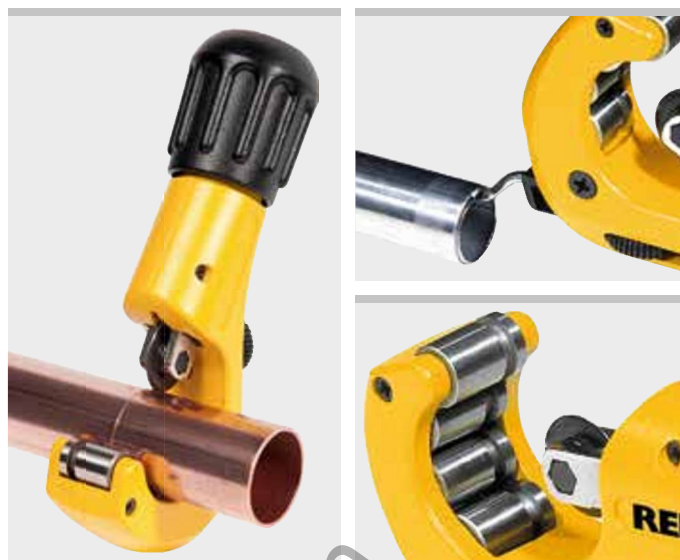

Supply format

REMS RAS Cu-INOX. Pipe cutting machine for copper pipes, thin-walled stainless steel pipes, thin-walled steel-aluminium pipes, brass pipes, with integrated pipe deburring device. With cutter wheel. In blister pack.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.
Cu-INOX 3–35	3–35 1/8–1 3/8"	4	113350
Cu-INOX 3–35 S, on needle bearings	3–35 1/8–1 3/8"	4	113351
Cu-INOX 3–42	3–42 1/8–1 3/4"	4	113330

REMS RAS Cu-INOX – quality pipe cutter.

Robust, solid design for heavy-duty application.

Sturdy spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX 8–64 S with needle bearing cutting wheel and needle bearing counter-pressure rollers for very easy cutting. Quick adjustment of the engagement spindle in both directions.

Only 1 cutter wheel for the complete working capacity Ø 3–120 mm.

Supply format

REMS RAS Cu-INOX. Tubing cutter for copper tubes, thin-walled stainless steel tubes, thin-walled steel, aluminium, brass tubes. With cutter wheel. In blister pack/in box.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	Art.-No.
Cu-INOX 3–28	3–28 1/8–1 1/8"	4	113300
Cu-INOX 6–42	6–42 1/4–1 5/8"	4	113380
Cu-INOX 6–64	6–64 1/4–2 1/2"	4	113400
Cu-INOX 8–64 S, on needle bearings, with quick adjustment	8–64 3/8–2 1/2"	4	113401
Cu-INOX 64–120	64–120 2 1/2–4"	4	113500


Accessories

Description	Wall thickness s ≤ mm	Art.-No.
REMS cutter wheel Cu-INOX 3–120, s 4	4	113210
REMS cutter wheel Cu-INOX 3–120 S, s 4, on needle bearings	4	113213
Universal deburring blade, ground		113360



Info

International
Design Award

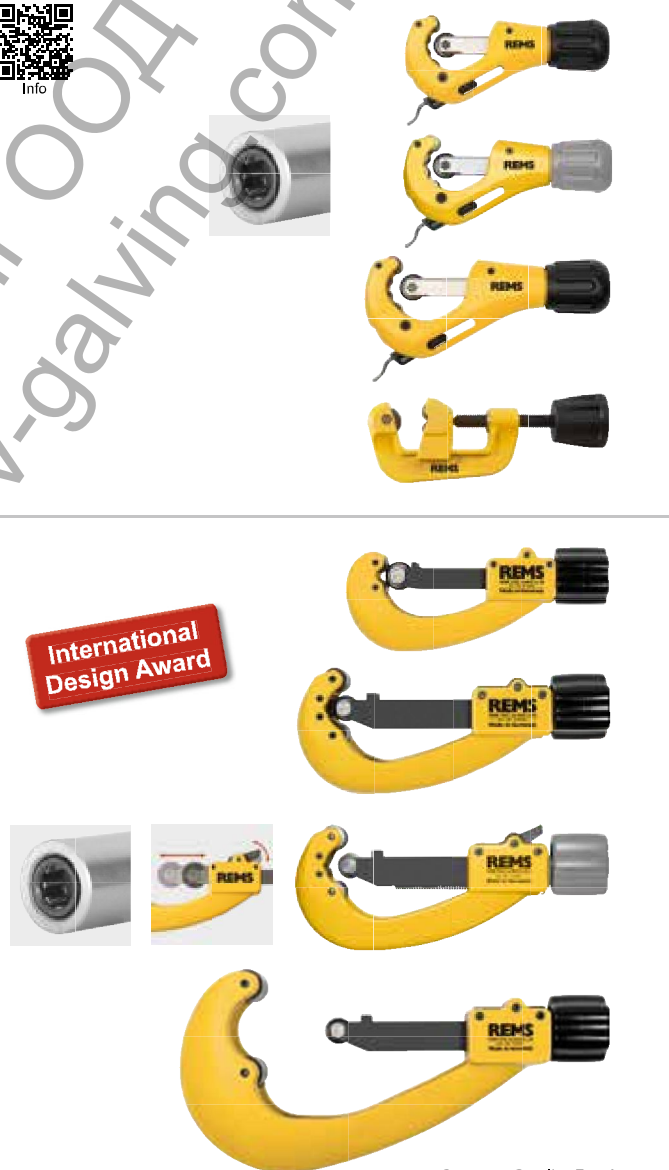

German Quality Products

