

## 1/2" IMPACT SOCKETS - HEX - METRIC




### Description :

- Designed specifically to withstand demands of impact machinery.
- Chrome-Molybdenum steel.
- For your safety, use impact sockets with appropriate rings and pins.

### Conditioning :

1

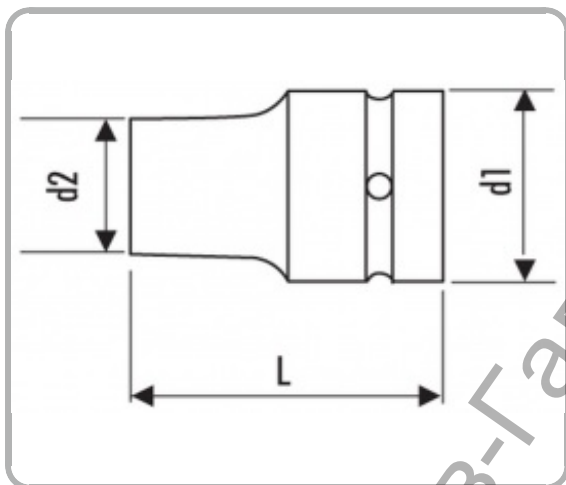

### References :

	EAN	A [mm]	d1 [mm]	d2 [mm]	L [mm]	[g]
<b>E113489</b>	3258951134894	8	25	15	38	86
<b>E113490</b>	3258951134900	10	25	17.5	38	87
<b>E113491</b>	3258951134917	11	25	18.7	38	89
<b>E113492</b>	3258951134924	12	25	20	38	89
<b>E113493</b>	3258951134931	13	25	21.3	38	88
<b>E113494</b>	3258951134948	14	25	22.5	38	88
<b>E113495</b>	3258951134955	15	30	23.7	38	136
<b>E113496</b>	3258951134962	16	30	25	38	138

<b><u>E113497</u></b>	3258951134979	17	30	26.2	38	133
<b><u>E113498</u></b>	3258951134986	18	30	27.5	38	134
<b><u>E113499</u></b>	3258951134993	19	30	28.7	38	128
<b><u>E113588</u></b>	3258951135884	21	30	30	38	120
<b><u>E113589</u></b>	3258951135891	22	30	32	38	160
<b><u>E113592</u></b>	3258951135921	24	30	35	45	177
<b><u>E113594</u></b>	3258951135945	27	30	38	50	222
<b><u>E113595</u></b>	3258951135952	28	30	40	50	225
<b><u>E113596</u></b>	3258951135969	30	30	42	50	240
<b><u>E113597</u></b>	3258951135976	32	30	44	50	244

Ташев-Галвинг ООД  
[www.tashev-galving.com](http://www.tashev-galving.com)