

### 3/8" 6-POINT SOCKETS - METRIC




**Description :**

- ISO 2725-1 - DIN 3124 - ISO 1174-1 - ISO 1711-1 - ISO 691
- Chrome vanadium steel.
- OGV Profile: tightening torque applied to the sides rather than to the angles of the nut.
- High Chrome finish.
- For manual use.

**Conditioning :**

10

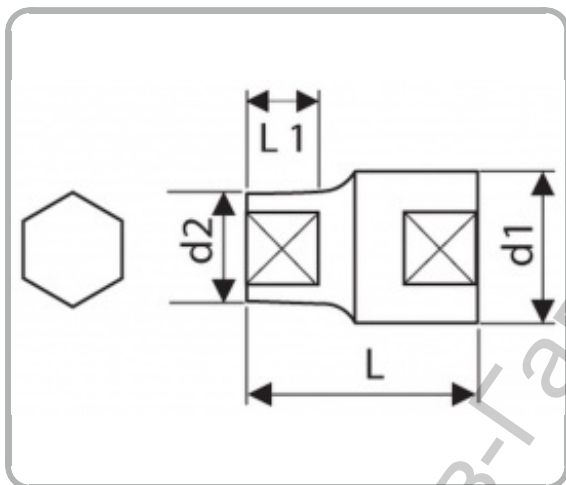

**References :**

<b>EXPERT</b>	<b>EAN</b>	<b>A [mm]</b>	<b>d1 [mm]</b>	<b>d2 [mm]</b>	<b>L [mm]</b>	<b>L1 [mm]</b>	<b>[g]</b>
<b>E030935</b>	3258950309354	6	17,1	10.1	25,70	5	18
<b>E030936</b>	3258950309361	7	17,1	10.8	25,70	6	18
<b>E030937</b>	3258950309378	8	17,1	12	25,70	6	20
<b>E030938</b>	3258950309385	9	17,1	13.1	25,70	6.5	20
<b>E030939</b>	3258950309392	10	17,1	14.7	25,70	7	20
<b>E030940</b>	3258950309408	11	17,1	16	25,70	8	22
<b>E030941</b>	3258950309415	12	17,1	17,1	25,70	8.5	22
<b>E030942</b>	3258950309422	13	18.3	18.3	25,70	8.5	28

<b><u>E030943</u></b>	3258950309439	14	19.5	19.5	25,70	10	30
<b><u>E030944</u></b>	3258950309446	15	20,4	20,4	25,70	10	33
<b><u>E030945</u></b>	3258950309453	16	22.1	22.1	25,70	10	46
<b><u>E030946</u></b>	3258950309460	17	23.3	23.3	25,70	10	52
<b><u>E030947</u></b>	3258950309477	18	24.2	24.2	25,70	11	56
<b><u>E030948</u></b>	3258950309484	19	25.5	25.5	25,70	12	64
<b><u>E030949</u></b>	3258950309491	20	26.8	26.8	29	14	68
<b><u>E030950</u></b>	3258950309507	21	27.7	27.7	29	14	72
<b><u>E030951</u></b>	3258950309514	22	29.8	29.8	29	14	86
<b><u>E030952</u></b>	3258950309521	23	30.8	30.8	29	14	90
<b><u>E030953</u></b>	3258950309538	24	31.8	31.8	29	14	96

Ташев-Галвинг ООД  
www.tashev-galving.com