

1/2" 12-POINT SOCKETS - METRIC




Description :

- ISO 2725-1 - DIN 3124 - ISO 1174-1 - ISO 1711-1 - ISO 691
- Chrome vanadium steel.
- OGV® profile: tightening torque applied to the sides rather than to the angles of the nut.
- High Chrome finish.
- For manual use.

Conditioning :

1

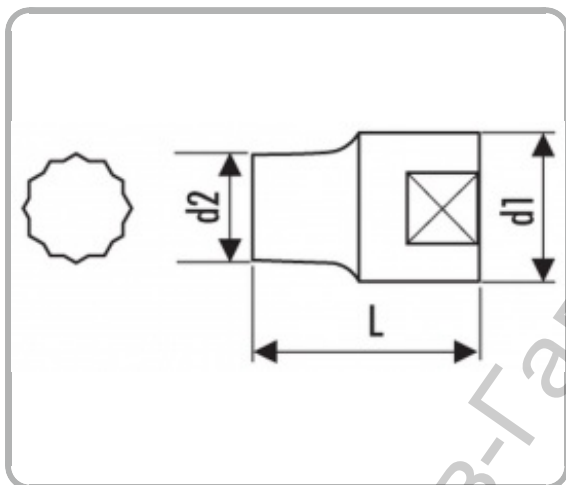

References :

	EAN	A [mm]	d1 [mm]	d2 [mm]	L [mm]	[g]
<u>E032001</u>	3258950320014	36	49.8	49.8	57,20	462
<u>E117051</u>	3258951170519	8	21.8	12.4	38	45
<u>E117052</u>	3258951170526	9	21.8	14	38	45
<u>E117053</u>	3258951170533	10	21.8	15.5	38	18
<u>E117054</u>	3258951170540	11	21.8	16.7	38	50
<u>E117055</u>	3258951170557	12	21.8	18	38	50
<u>E117056</u>	3258951170564	13	21.8	19.2	38	52
<u>E117057</u>	3258951170571	14	21.8	20.5	38	54

<u>E117058</u>	3258951170588	15	21.8	21	38	54
<u>E117059</u>	3258951170595	16	23.3	22.5	38	66
<u>E117060</u>	3258951170601	17	24	24	38	76
<u>E117061</u>	3258951170618	18	24.8	24.8	38	84
<u>E117062</u>	3258951170625	19	26.3	26.3	38	84
<u>E117063</u>	3258951170632	20	26.8	26.8	38	84
<u>E117064</u>	3258951170649	21	27.7	27.7	38	92
<u>E117065</u>	3258951170656	22	29.8	29.8	40	118
<u>E117066</u>	3258951170663	23	30.8	30.8	40	125
<u>E117067</u>	3258951170670	24	31.8	31.8	40	134
<u>E117068</u>	3258951170687	26	33,8	33,8	41	160
<u>E117069</u>	3258951170694	27	35,8	35,8	41	192
<u>E117070</u>	3258951170700	28	37.6	37.6	41	210
<u>E117071</u>	3258951170717	29	37,8	37,8	41	210
<u>E117072</u>	3258951170724	30	39,8	39,8	41	234
<u>E117073</u>	3258951170731	32	41.8	41.8	41	266

Ташев-Галвинг ООД
www.tashev-galving.com