

## 1/2" LONG IMPACT SOCKETS - HEX - METRIC



### Description :


- Designed specifically to withstand demands of impact machinery.
- Chrome-Molybdenum steel.
- For your safety, use impact sockets with appropriate rings and pins.

### L [mm] :

78

### Conditioning :

1

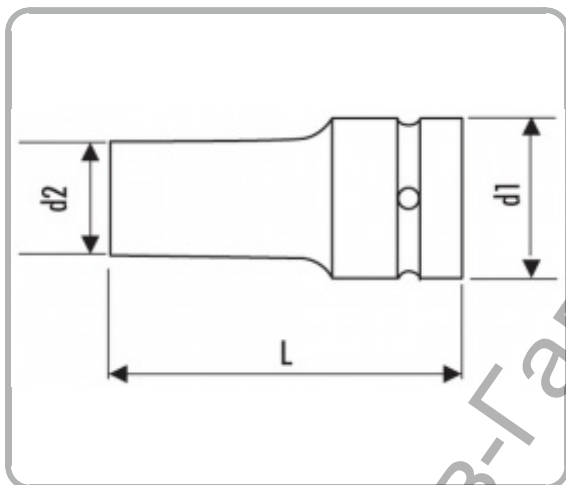

### References :

	EAN	A [mm]	d1 [mm]	d2 [mm]	[g]
<b><u>E113598</u></b>	3258951135983	10	25	17.5	139
<b><u>E113599</u></b>	3258951135990	11	25	18.7	147
<b><u>E113600</u></b>	3258951136003	13	25	21.3	165
<b><u>E113605</u></b>	3258951136058	14	25	22.5	168
<b><u>E113606</u></b>	3258951136065	16	30	25	238
<b><u>E113607</u></b>	3258951136072	17	30	26.2	238
<b><u>E113608</u></b>	3258951136089	18	30	27.5	252
<b><u>E113609</u></b>	3258951136096	19	30	28.7	252

<b><u>E113610</u></b>	3258951136102	21	30	31	272
<b><u>E113611</u></b>	3258951136119	22	30	32	279
<b><u>E113612</u></b>	3258951136126	24	30	35	325
<b><u>E113613</u></b>	3258951136133	27	30	38	384
<b><u>E113614</u></b>	3258951136140	30	30	42	411
<b><u>E113615</u></b>	3258951136157	32	30	44	427

Ташев-Галвинг ООД  
[www.tashev-galving.com](http://www.tashev-galving.com)