

3/4" LONG IMPACT SOCKETS - METRIC



Description :

- Designed specifically to withstand demands of impact machinery.
- Chrome-Molybdenum steel.
- For your safety, use impact sockets with appropriate rings and pins.

d1 [mm] :


44

L [mm] :

95

Conditioning :

1

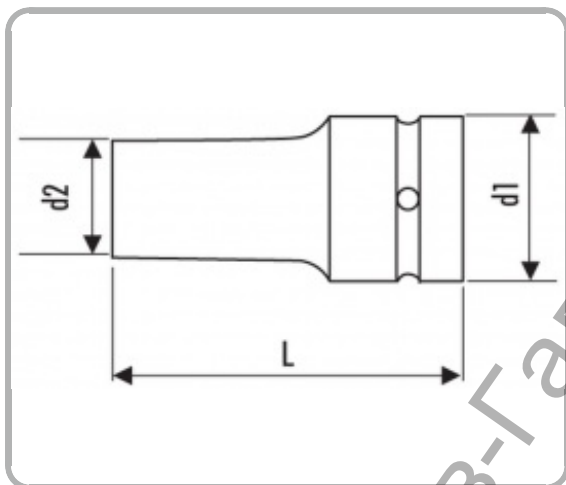

References :

	EAN	A [mm]	d2 [mm]	[g]
<u>E041301</u>	3258950413013	33	52	800
<u>E041302</u>	3258950413020	41	60	1000
<u>E041303</u>	3258950413037	46	67	1200
<u>E113480</u>	3258951134801	17	31	541
<u>E113481</u>	3258951134818	19	33	566
<u>E113482</u>	3258951134825	24	39	634
<u>E113483</u>	3258951134832	27	43	705
<u>E113484</u>	3258951134849	30	47	734

<u>E113485</u>	3258951134856	32	49	829
<u>E113486</u>	3258951134863	36	54	930

Ташев-Галвинг ООД
www.tashev-galving.com