

1/2" LONG IMPACT SOCKETS - HEX - METRIC



Description :


- Designed specifically to withstand demands of impact machinery.
- Chrome-Molybdenum steel.
- For your safety, use impact sockets with appropriate rings and pins.

L [mm] :

78

Conditioning :

1

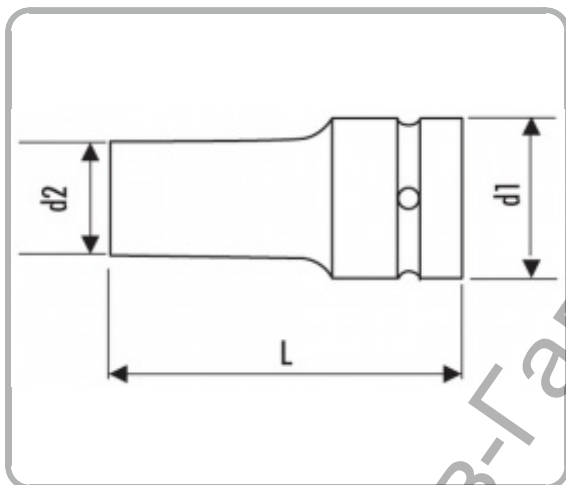

References :

| | EAN | A [mm] | d1 [mm] | d2 [mm] | [g] |
|-----------------------|---------------|--------|---------|---------|-----|
| <u>E113598</u> | 3258951135983 | 10 | 25 | 17.5 | 139 |
| <u>E113599</u> | 3258951135990 | 11 | 25 | 18.7 | 147 |
| <u>E113600</u> | 3258951136003 | 13 | 25 | 21.3 | 165 |
| <u>E113605</u> | 3258951136058 | 14 | 25 | 22.5 | 168 |
| <u>E113606</u> | 3258951136065 | 16 | 30 | 25 | 238 |
| <u>E113607</u> | 3258951136072 | 17 | 30 | 26.2 | 238 |
| <u>E113608</u> | 3258951136089 | 18 | 30 | 27.5 | 252 |
| <u>E113609</u> | 3258951136096 | 19 | 30 | 28.7 | 252 |

| | | | | | |
|-----------------------|---------------|----|----|----|-----|
| <u>E113610</u> | 3258951136102 | 21 | 30 | 31 | 272 |
| <u>E113611</u> | 3258951136119 | 22 | 30 | 32 | 279 |
| <u>E113612</u> | 3258951136126 | 24 | 30 | 35 | 325 |
| <u>E113613</u> | 3258951136133 | 27 | 30 | 38 | 384 |
| <u>E113614</u> | 3258951136140 | 30 | 30 | 42 | 411 |
| <u>E113615</u> | 3258951136157 | 32 | 30 | 44 | 427 |

Ташев-Галвинг ООД
www.tashev-galving.com