

1/2" IMPACT SOCKETS - HEX - METRIC




Description :

- Designed specifically to withstand demands of impact machinery.
- Chrome-Molybdenum steel.
- For your safety, use impact sockets with appropriate rings and pins.

Conditioning :

1

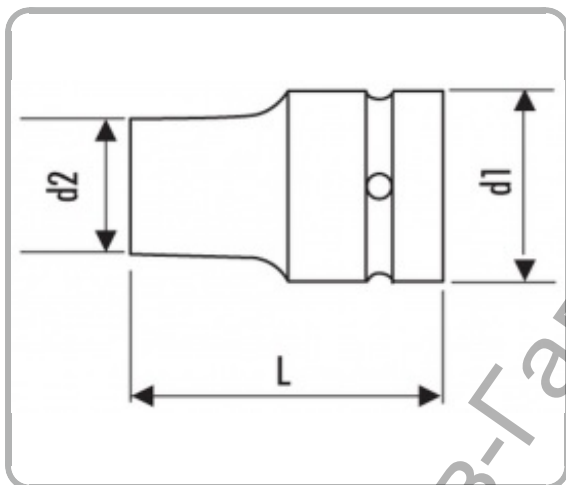

References :

	EAN	A [mm]	d1 [mm]	d2 [mm]	L [mm]	[g]
E113489	3258951134894	8	25	15	38	86
E113490	3258951134900	10	25	17.5	38	87
E113491	3258951134917	11	25	18.7	38	89
E113492	3258951134924	12	25	20	38	89
E113493	3258951134931	13	25	21.3	38	88
E113494	3258951134948	14	25	22.5	38	88
E113495	3258951134955	15	30	23.7	38	136
E113496	3258951134962	16	30	25	38	138

<u>E113497</u>	3258951134979	17	30	26.2	38	133
<u>E113498</u>	3258951134986	18	30	27.5	38	134
<u>E113499</u>	3258951134993	19	30	28.7	38	128
<u>E113588</u>	3258951135884	21	30	30	38	120
<u>E113589</u>	3258951135891	22	30	32	38	160
<u>E113592</u>	3258951135921	24	30	35	45	177
<u>E113594</u>	3258951135945	27	30	38	50	222
<u>E113595</u>	3258951135952	28	30	40	50	225
<u>E113596</u>	3258951135969	30	30	42	50	240
<u>E113597</u>	3258951135976	32	30	44	50	244

Ташев-Галвинг ООД
www.tashev-galving.com