

### 3/4" IMPACT SOCKETS - METRIC




**Description :**

- Designed specifically to withstand demands of impact machinery.
- Chrome-Molybdenum steel.
- For your safety, use impact sockets with appropriate rings and pins.

**Conditioning :**

1

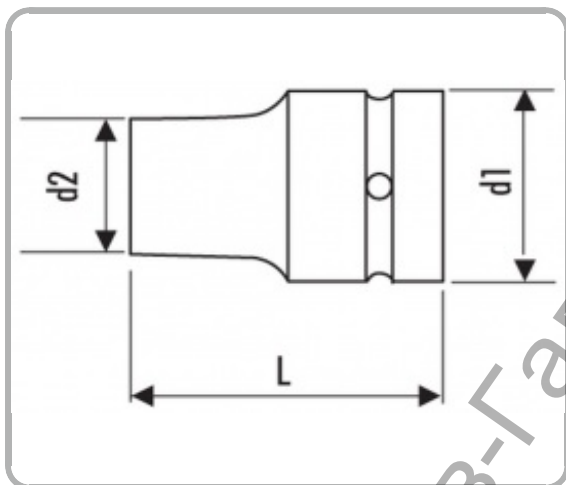

**References :**

<b>EXPERT</b>	<b>EAN</b>	<b>A [mm]</b>	<b>d1 [mm]</b>	<b>d2 [mm]</b>	<b>L [mm]</b>	<b>[g]</b>
<b><u>E041101</u></b>	3258950411019	17	30	26.2	38	367
<b><u>E041102</u></b>	3258950411026	19	30	28.7	38	367
<b><u>E041103</u></b>	3258950411033	21	30	30	38	367
<b><u>E041104</u></b>	3258950411040	22	30	32	38	367
<b><u>E041105</u></b>	3258950411057	24	30	35	45	400
<b><u>E041106</u></b>	3258950411064	27	30	38	50	400
<b><u>E113468</u></b>	3258951134689	28	30	40	50	400
<b><u>E113469</u></b>	3258951134696	29	44	45	54	400

<b><u>E113470</u></b>	3258951134702	30	30	42	50	429
<b><u>E113471</u></b>	3258951134719	32	30	44	50	475
<b><u>E113472</u></b>	3258951134726	33	44	51	56	481
<b><u>E113473</u></b>	3258951134733	34	44	52	56	492
<b><u>E113474</u></b>	3258951134740	35	44	53	56	523
<b><u>E113475</u></b>	3258951134757	36	44	54	56	523
<b><u>E113476</u></b>	3258951134764	38	44	57	58	565
<b><u>E113477</u></b>	3258951134771	41	44	60	58	608
<b><u>E113478</u></b>	3258951134788	42	44	62	58	660
<b><u>E113479</u></b>	3258951134795	46	44	67	63	770

Ташев-Галвинг ООД  
[www.tashev-galving.com](http://www.tashev-galving.com)