

1/2" 12-POINT SOCKETS - METRIC




Description :

- ISO 2725-1 - DIN 3124 - ISO 1174-1 - ISO 1711-1 - ISO 691
- Chrome vanadium steel.
- OGV® profile: tightening torque applied to the sides rather than to the angles of the nut.
- High Chrome finish.
- For manual use.

Conditioning :

1

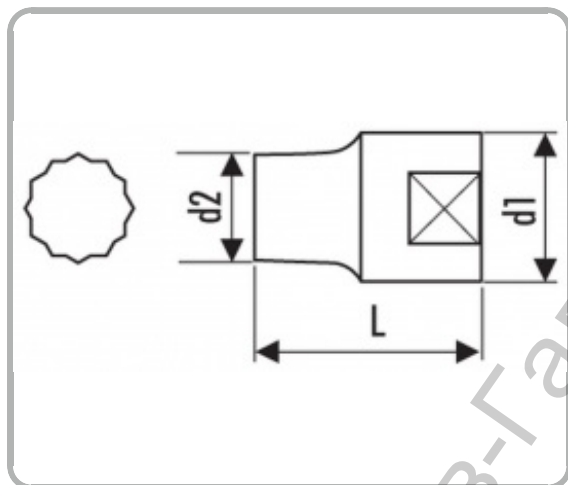

References :

	EAN	A [mm]	d1 [mm]	d2 [mm]	L [mm]	[g]
E032001	3258950320014	36	49.8	49.8	57,20	462
E117051	3258951170519	8	21.8	12.4	38	45
E117052	3258951170526	9	21.8	14	38	45
E117053	3258951170533	10	21.8	15.5	38	18
E117054	3258951170540	11	21.8	16.7	38	50
E117055	3258951170557	12	21.8	18	38	50
E117056	3258951170564	13	21.8	19.2	38	52
E117057	3258951170571	14	21.8	20.5	38	54

<u>E117058</u>	3258951170588	15	21.8	21	38	54
<u>E117059</u>	3258951170595	16	23.3	22.5	38	66
<u>E117060</u>	3258951170601	17	24	24	38	76
<u>E117061</u>	3258951170618	18	24.8	24.8	38	84
<u>E117062</u>	3258951170625	19	26.3	26.3	38	84
<u>E117063</u>	3258951170632	20	26.8	26.8	38	84
<u>E117064</u>	3258951170649	21	27.7	27.7	38	92
<u>E117065</u>	3258951170656	22	29.8	29.8	40	118
<u>E117066</u>	3258951170663	23	30.8	30.8	40	125
<u>E117067</u>	3258951170670	24	31.8	31.8	40	134
<u>E117068</u>	3258951170687	26	33,8	33,8	41	160
<u>E117069</u>	3258951170694	27	35,8	35,8	41	192
<u>E117070</u>	3258951170700	28	37.6	37.6	41	210
<u>E117071</u>	3258951170717	29	37,8	37,8	41	210
<u>E117072</u>	3258951170724	30	39,8	39,8	41	234
<u>E117073</u>	3258951170731	32	41.8	41.8	41	266