

## 1/2" LONG IMPACT SOCKETS - HEX - METRIC



### Description :


- Designed specifically to withstand demands of impact machinery.
- Chrome-Molybdenum steel.
- For your safety, use impact sockets with appropriate rings and pins.

### L [mm] :

78

### Conditioning :

1

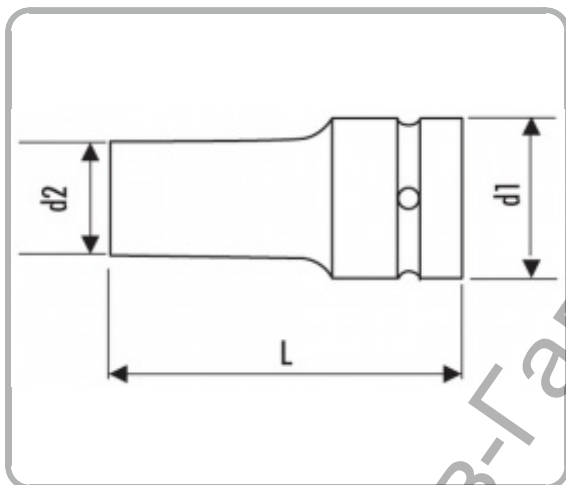

### References :

|                | EAN           | A [mm] | d1 [mm] | d2 [mm] | [g] |
|----------------|---------------|--------|---------|---------|-----|
| <b>E113598</b> | 3258951135983 | 10     | 25      | 17.5    | 139 |
| <b>E113599</b> | 3258951135990 | 11     | 25      | 18.7    | 147 |
| <b>E113600</b> | 3258951136003 | 13     | 25      | 21.3    | 165 |
| <b>E113605</b> | 3258951136058 | 14     | 25      | 22.5    | 168 |
| <b>E113606</b> | 3258951136065 | 16     | 30      | 25      | 238 |
| <b>E113607</b> | 3258951136072 | 17     | 30      | 26.2    | 238 |
| <b>E113608</b> | 3258951136089 | 18     | 30      | 27.5    | 252 |
| <b>E113609</b> | 3258951136096 | 19     | 30      | 28.7    | 252 |

|                       |               |    |    |    |     |
|-----------------------|---------------|----|----|----|-----|
| <b><u>E113610</u></b> | 3258951136102 | 21 | 30 | 31 | 272 |
| <b><u>E113611</u></b> | 3258951136119 | 22 | 30 | 32 | 279 |
| <b><u>E113612</u></b> | 3258951136126 | 24 | 30 | 35 | 325 |
| <b><u>E113613</u></b> | 3258951136133 | 27 | 30 | 38 | 384 |
| <b><u>E113614</u></b> | 3258951136140 | 30 | 30 | 42 | 411 |
| <b><u>E113615</u></b> | 3258951136157 | 32 | 30 | 44 | 427 |

Ташев-Галвинг ООД  
[www.tashev-galving.com](http://www.tashev-galving.com)