

DIN 439 sim. EN ISO 4035



Dado esagonale basso, tipo B, con smusso


Hexagon thin nut, with chamfer


Disponibile
Available


A2 

A4 

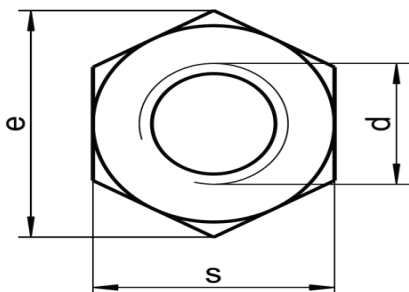

| | | | | | | | | | | |
|--|------|------|------|------|------|------|------|------|-------|-------|
| m | 0,75 | 0,95 | 0,95 | 1,35 | 1,35 | 1,55 | 1,95 | 2,45 | 2,9 | 3,7 |
| s | 3,2 | 4 | 4,5 | 5 | 5 | 5,5 | 7 | 8 | 10 | 13 |
| e | 3,48 | 4,32 | 5,2 | 5,45 | 5,8 | 6,01 | 7,66 | 8,79 | 11,05 | 14,38 |
|  | 3,2 | 4 | 4,5 | 5 | 5 | 5,5 | 7 | 8 | 10 | 13 |
| d | M1,6 | M2 | M2,3 | M2,5 | M2,6 | M3 | M4 | M5 | M6 | M8 |

| | | | | | | | | | | |
|---|------|------|-------|-------|-------|-------|-------|-------|------|-------|
| m | 4,7 | 5,7 | 6,42 | 7,42 | 8,42 | 9,1 | 9,9 | 10,9 | 12,4 | 13,9 |
| s | 17 | 19 | 22 | 24 | 27 | 30 | 32 | 36 | 41 | 46 |
| e | 18,9 | 21,1 | 24,49 | 26,75 | 29,56 | 32,95 | 35,03 | 39,55 | 45,2 | 50,85 |
|  | 17 | 19 | 22 | 24 | 27 | 30 | 32 | 36 | 41 | 46 |
| d | M10 | M12 | M14 | M16 | M18 | M20 | M22 | M24 | M27 | M30 |

| | | | | | | | | | | |
|---|-------|-------|-------|------|-------|------|--|--|--|--|
| m | 15,4 | 16,9 | 18,2 | 19,7 | 21,2 | 22,7 | | | | |
| s | 50 | 55 | 60 | 65 | 70 | 75 | | | | |
| e | 55,37 | 60,79 | 66,44 | 71,3 | 76,95 | 82,6 | | | | |
|  | 50 | 55 | 60 | 65 | 70 | 75 | | | | |
| d | M33 | M36 | M39 | M42 | M45 | M48 | | | | |

Disponibili anche con passo fine e filetto sinistro
Available also with fine and Left thread (LH)

last edit 03/04/2020

DRAWING N. 1149