


Дюбел универсален,к-кт с винт T FUR 8 x 120 T K NV, блистер

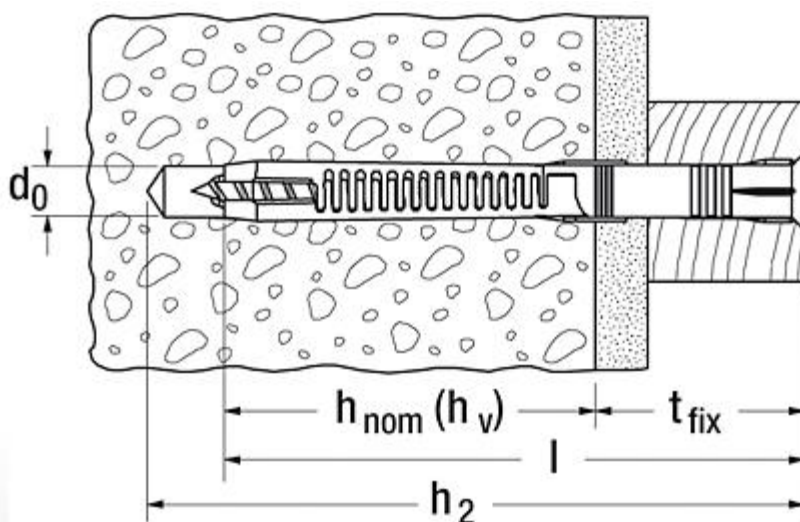

Drill hole diameter	d_0	8	[mm]
Anchor length	l	120	[mm]
Min. drill hole depth	h_1	130	[mm]
Min. drill hole depth for through fixings	h_2	130	[mm]
Min. anchorage depth	$h_{nom} (h_v)$	70	[mm]
Max. fixture thickness	t_{fix}	50	[mm]
Drive		T30	
fischer safety screw	$d_s \times l_s$	6 x 125	[mm]
Card contents		4 x FUR 8 x 120 T, 4 x safety screw 6 x 125 T30	
Sales unit		10	[pcs]
GTIN (EAN Code)		4006209909379	