
## fischer Gravity toggle KM 10

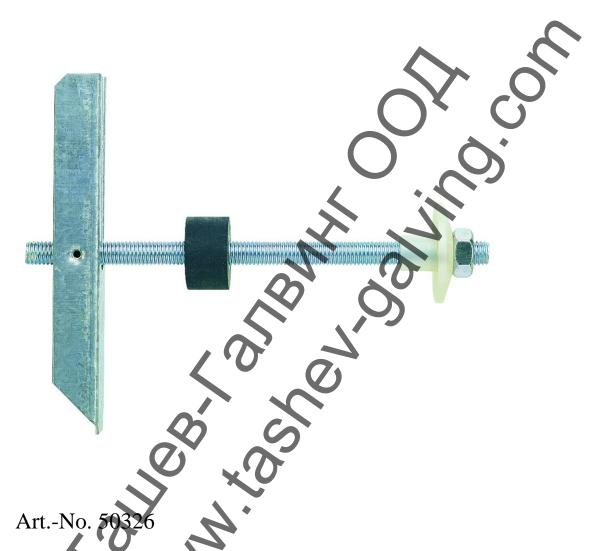

- High load capacity due to good load distribution on the transition beams.
- Maximum flexibility with panel thickness and fixture thickness.
- High flexibility due to a long threaded rod. Use with various panel thicknesses and attachment thicknesses.
- No installation tool necessary.
- Suitable for pre-positioned installation.

## Technical Data

Drill diameter	30	[mm]
Max. panel thickness	90	[mm]
Min. cavity depth	140	[mm]
Anchor length	180	[mm]
Packaging	Folding box	
Amount	25	[St.]
GTIN (EAN-Code)	4006209503263	