

100 W 230 V R7S

HALOLINE Standard | Double ended halogen lamps with tube base



- Ideal for emphasizing and accentuating buildings
- General illumination
- Entrance lighting
- Pathway lighting
- Garden lighting
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications

Product benefits

- Brilliant accent light
- No transformer required
- Contains no mercury, can be thrown away with normal household waste

Product features

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index R_a : 100
- Color temperature: 3,000 K
- Base: R7s
- Base: FA4

Technical data

Electrical data



Rated wattage	1000 W
Nominal wattage	1000 W
Nominal voltage	230 V
Rated power factor λ	1.00

Light technical data

Rated luminous flux	22000 lm
Rated color temperature	2900 K
Rated color rendering index Ra	100
Rated starting time	0.0 s
Rated warm-up time (60 %)	0 s

Dimensions & weight

Length	191.1 mm
Overall length	254.0 mm
Diameter	12.0 mm
Outer bulb	T12

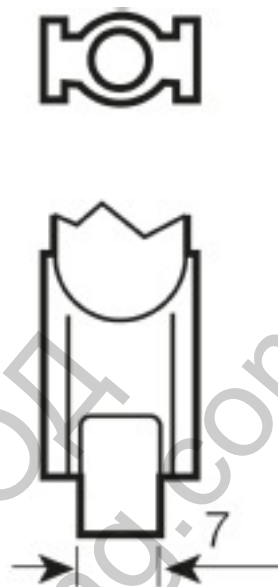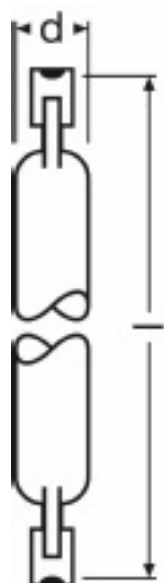

Product line drawing with letters

Base

Colors & materials

Rated lamp mercury content	0.0 mg
Mercury-free	Yes

Lifespan

Rated number of switching cycles	1000000 ¹⁾
----------------------------------	-----------------------

¹⁾ At 1 s on / 1 s off

Additional product data

Base (standard designation)	R7s
Footnote used only for product	Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required

Capabilities

Dimmable	Yes
Burning position	p15
Fuse, quick-acting	6.3 A
Non-standard conditions	P 15

Certificates & standards

EEI – Energy Label	F
---------------------------	---

Country specific categorizations

ILCOS	HDG-1000-230-R7s-191,1
Order reference	64740

Ташев-Галвинг ООД
www.tashev-galving.com



Burning position

Ташев-Галвинг ООД
www.tashev-galving.com

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300004174	Folding carton box 1	30 mm x 26 mm x 238 mm	24.10 g	0.19 dm ³
4050300206875	Shipping carton box 12	112 mm x 85 mm x 245 mm	352.20 g	2.33 dm ³

Ташев-Галвинг ООД
www.tashev-galving.com

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Ташев-Галвинг ООД
www.tashev-galving.com