

OSRAM DULUX D/E

26 W/840 G24Q-3



- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

Product benefits

- Very economical
- Good quality of light
- Excellent luminous flux
- Long service life
- Improved maintenance
- Easier handling thanks to the new GR14q-1 base system
- OSRAM System+ Guarantee in combination with OSRAM QUICKTRONIC ECG

Product features

- Short and compact pin-base lamp with double-turn tubes
- Average life: 20,000 h (with QUICKTRONIC)
- Color rendering index R_a : 80...89
- Dimmable (3...100 %)
- Single-ended four-pin plug-in G24q base
- Operates on battery, solar and AC power with suitable Electronic Control Gear



Technical data

Electrical data


Nominal wattage	26 W
Rated lamp efficacy (HF data)	Under clarification by authority and standardization body
Rated lamp efficacy (standard condition)	69 lm/W
Rated wattage	26 W

Light technical data


Rated color rendering index Ra	80...89
Rated luminous flux	1800 lm
Luminous flux at 25 °C	1800 lm
Light color	840
Rated color temperature	4000 K
Nominal luminous flux	1800 lm
Light color as per EN 12464-1	LUMILUX Cool White
Rated LLMF at 2,000 h	0.89
Rated LLMF at 4,000 h	0.86
Rated LLMF at 6,000 h	0.84
Rated LLMF at 8,000 h	0.82
Rated LLMF at 12,000 h	0.79
Rated LLMF at 16,000 h	0.78
Rated LLMF at 20,000 h	0.76
Luminance	5.5 cd/cm ²

Dimensions & weight


Tube diameter	12 mm
Length	165.0 mm
Length acc. to IEC standard	160 mm
Length with base excl. base pins/connection	149.00 mm

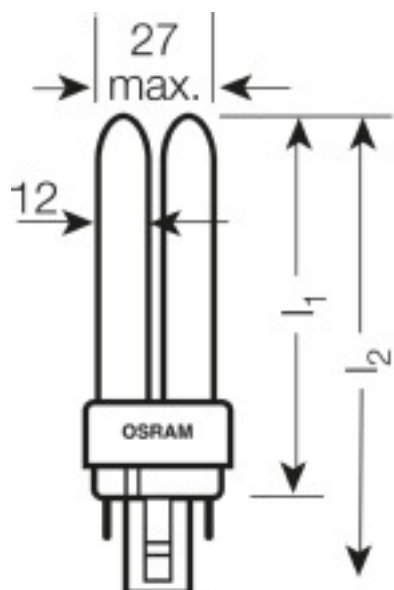


Product line drawing with numbers

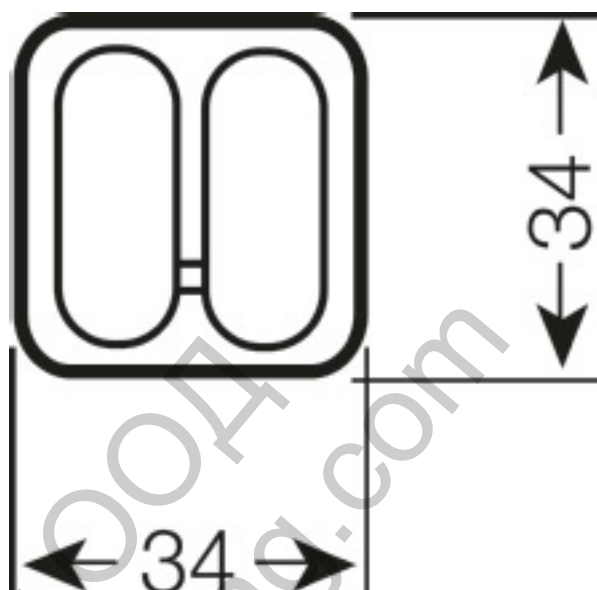

Prod line drw, top, neutral dimensions

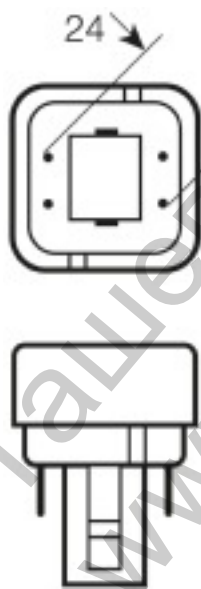

Base

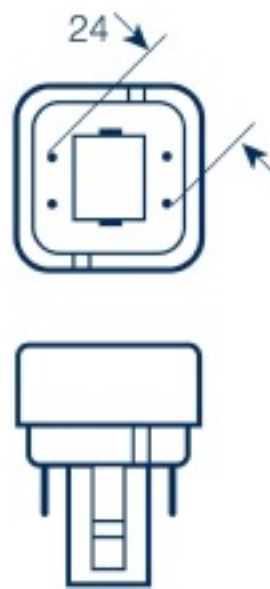

Base

Colors & materials

Rated lamp mercury content	1.4 mg
----------------------------	--------

Temperatures

Rated ambient temp.w.max.luminous flux	25.0 °C
--	---------


Lifespan

Service life	13000 h ¹⁾
Lifespan	20000 h ¹⁾
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.95
Rated lamp survival factor at 16,000 h	0.81
Rated lamp survival factor at 20,000 h	0.50
Operation mode LLMF/LSF	HF

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	G24q-3
Appropriate disposal acc. to WEEE	Yes

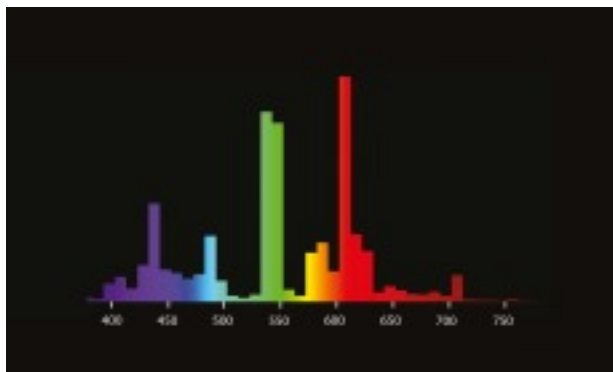

Spectral power distribution

Capabilities

Suitable for indoor

Yes

Certificates & standards

EEI – Energy Label

B

Lamp-ECG combination (System)

QT-ECO 1x26/220-240 S

Products

QT-ECO 1x26/220-240 S

QT-ECO T/E 2x26/220-240

Products

QT-ECO T/E 2x26/220-240

QT-M 2x26-42/220-240 S

Products

QT-M 2x26-42/220-240 S

QTP-M 1x26-42

Products

QTP-M 1x26-42

QTP-M 2x26-32

Products

QTP-M 2x26-32

QTP-T/E (1x26-42), 2x26

Products

QTP-T/E 1x26-42, 2x26

QTP-T/E 1x26-42, (2x26)

Products

QTP-T/E 1x26-42, 2x26

QTi DALI-T/E 1x18-57 DIM

Products

QTi DALI-T/E 1x18-57 DIM

QTi DALI-T/E 2x18-42 DIM

Products

QTi DALI-T/E 2x18-42 DIM

QTi-T/E 1x18-57 DIM

Products

QTi-T/E 1x18-57 DIM

QTi-T/E 2x18-42 DIM

Products



QTi-T/E 2x18-42 DIM

Equipment / Accessories

- Suitable for operation on electronic control gear

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp

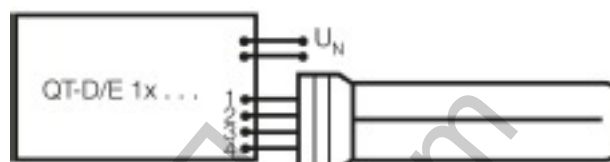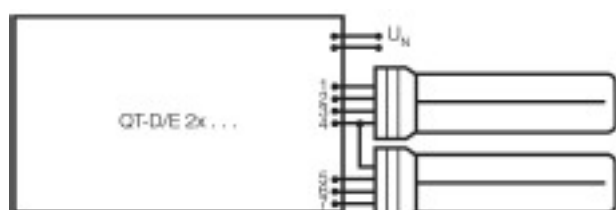

Circuit diagram

Circuit diagram

Ташев-Галвинг ООД
www.tashev-galving.com

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300020303	Folding carton box 1	36 mm x 36 mm x 179 mm	56.00 g	0.23 dm ³
4050300253107	Shipping carton box 10	112 mm x 181 mm x 196 mm	635.00 g	3.97 dm ³

Ташев-Галвинг ООД
www.tashev-galving.com

References / Links

For more information on QUICKTRONIC electronic control gear go to

▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Ташев-Галвинг ООД
www.tashev-galving.com