



CorePro LEDlinear MV

CorePro LED linear D 14-120W R7S 118 840

CorePro R7S is a retrofit replacement for traditional double-ended linear R7S lamps. Its 'light all around' design delivers light just like a halogen lamp. Within the range you can choose dimmable products which have deep dimming function that enables a cozy ambience when using a dimmable fixture.

Product data

| General Information | | Warm Up Time to 60% Light (Nom) | |
|---------------------------------------|---------------------|---------------------------------|--|
| Cap-Base | R7S [R7s] | Warm Up Time to 60% Light (Nom) | 0.5 s |
| EU RoHS compliant | Yes | Power Factor (Nom) | 0.8 |
| Nominal Lifetime (Nom) | 15000 h | Voltage (Nom) | 220-240 V |
| Switching Cycle | 50000X | Temperature | |
| Technical Type | 14-120W | T-Case Maximum (Nom) | 100 °C |
| Light Technical | | Controls and Dimming | |
| Color Code | 840 [CCT of 4000K] | Dimmable | Yes |
| Luminous Flux (Nom) | 2000 lm | Approval and Application | |
| Color Designation | Cool White (CW) | Energy Efficiency Label (EEL) | A++ |
| Correlated Color Temperature (Nom) | 4000 K | Energy Consumption kWh/1000 h | 14 kWh |
| Luminous Efficacy (rated) (Nom) | 142.86 lm/W | Product Data | |
| Color Consistency | <6 | Full product code | 871869671406500 |
| Color Rendering Index (Nom) | 80 | Order product name | CorePro LED linear D 14-120W R7S 118 840 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % | EAN/UPC - Product | 8718696714065 |
| Operating and Electrical | | Order code | 929001353702 |
| Input Frequency | 50 to 60 Hz | Numerator - Quantity Per Pack | 1 |
| Power (Nom) | 14 W | Numerator - Packs per outer box | 10 |
| Lamp Current (Nom) | 75 mA | Material Nr. (12NC) | 929001353702 |
| Wattage Equivalent | 120 W | Net Weight (Piece) | 0.095 kg |
| Starting Time (Nom) | 0.5 s | | |

CorePro LEDlinear MV



Dimensional drawing

C

| Product | D | C |
|--|-------|--------|
| CorePro LED linear D 14-120W R7S 118 840 | 29 mm | 118 mm |


R7S 220V 15.5W-120W 2000lm 4000K R7S D

Photometric data

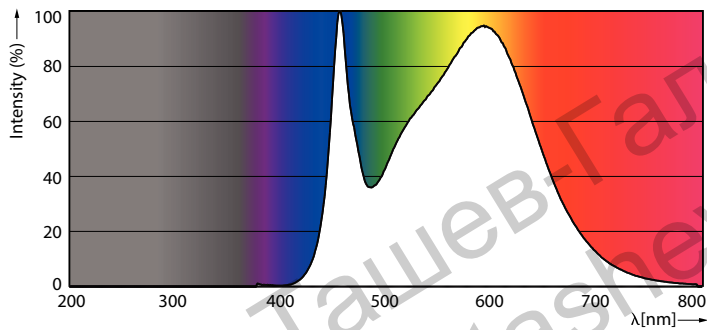

NAM Highway 165W EX39 4000K 60-120D NB WB UDL


CorePro LEDlinearMV 14-120W R7S 840 D

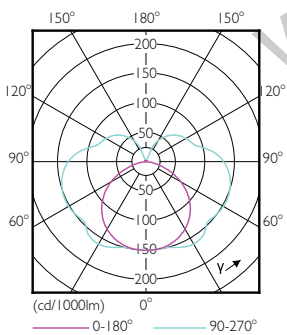


CorePro LEDlinearMV 14-120W R7S 830 D

CorePro LEDlinear MV

Lifetime

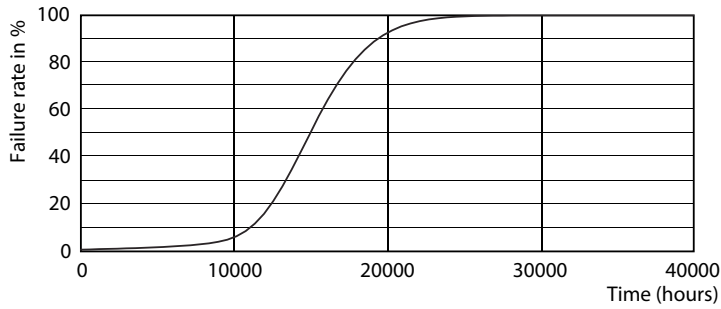

LEDbulb 60W E14 827 FR B38

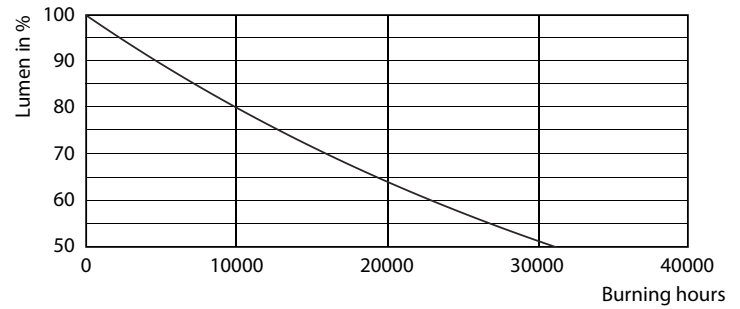

LEDbulb 60W E14 827 FR B38

Ташев-Галвинг ООД
www.tashev-galving.com

