



## Plusline Large (double ended)

### Plusline Large 1000W R7s 230V 1CT/10

Mains-voltage linear with a coiled-coil filament, giving white halogen light


#### Product data

General Information		Controls and Dimming	
Cap-Base	R7S [ R7s]	Dimmable	Yes
Operating Position	P4 [ Parallel +/-4D or Horizontal(HOR)]	<b>Mechanical and Housing</b>	
Nominal Lifetime (Nom)	2000 h	Bulb Finish	Clear
Switching Cycle	8000X	<b>Approval and Application</b>	
<b>Light Technical</b>		Energy Efficiency Label	C
Luminous Flux (Nom)	21500 lm	Energy Consumption kWh/1000 h	1000 kWh
Luminous Flux (Rated) (Nom)	21500 lm	<b>Luminaire Design Requirements</b>	
Colour Temperature, horizontal (Nom)	2900 K	Bulb Temperature (Max)	900 °C
Luminous Efficacy (rated) (Nom)	21.5 lm/W	Pinch Temperature (Max)	350 °C
Colour Rendering Index horiz (Nom)	100	<b>Product Data</b>	
LLMF at End of Nominal Lifetime (Min)	80 %	Full product code	871150049434401
<b>Operating and Electrical</b>		Order product name	Plusline Large 1000W R7s 230V 1CT/10
Power (Rated) (Nom)	1000 W	EAN/UPC - Product	8711500494344
Lamp Current (Nom)	4.35 A	Order code	49434401
Starting Time (Nom)	0.0 s	Numerator - Quantity Per Pack	1
Warm Up Time to 60% Light (Nom)	instant full light	Numerator - Packs per outer box	10
Power Factor (Nom)	1	Material Nr. (12NC)	923932143203
Voltage (Nom)	230 V	Net Weight (Piece)	0.016 kg

## Plusline Large (double ended)

ILCOS Code HDG//RS-1000-230-R7s-185,7

### Dimensional drawing

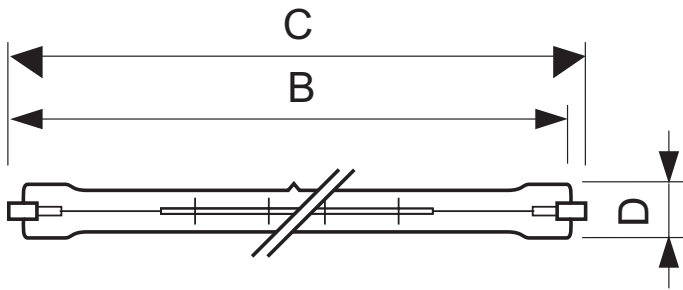

Product	D (max)	B (max)	B	B (min)	C (max)
Plusline Large 1000W R7s 230V ICT/10	11 mm	187.3 mm	185.7 mm	184.1 mm	189.1 mm

DEBig 1000W R7s 230V T11 CL

Ташев-Галвинг ООД  
www.tashev-galving.com