

PHILIPS

Lighting



MASTER SON-T PIA Plus

MASTER SON-T PIA Plus 100W/220 E40 1SL/12

High Pressure Sodium lamp with clear tubular outer bulb, high output and long reliable lifetime

Warnings and Safety

- Control gear must include end-of-life protection (IEC 60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	E40 [E40]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	17000 h
Life To 10% Failures (Nom)	21000 h
Life to 20% Failures (Nom)	26000 h
Life to 50% Failures (Nom)	36000 h
ANSI Code HID	-
System Description	External Ignitor
LSF 2000 h Rated	100 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	98 %
LSF 16000 h Rated	96 %
LSF 20000 h Rated	91 %


Light Technical	
Color Code	220 [CCT of 2000K]
Luminous Flux (Rated) (Nom)	10600 lm
Chromaticity Coordinate X (Nom)	535
Chromaticity Coordinate Y (Nom)	420
Correlated Color Temperature (Nom)	2000 K
Luminous Efficacy (rated) (Nom)	105 lm/W
Color Rendering Index (Max)	25
LLMF 2000 h Rated	98 %
LLMF 4000 h Rated	96 %
LLMF 6000 h Rated	95 %
LLMF 8000 h Rated	94 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	90 %
LLMF 20000 h Rated	89 %
Ratio Scotopic/Photopic Lumens	0.55

MASTER SON-T PIA Plus

Operating and Electrical	
Lamp supply voltage	230 V [230]
Power (Nom)	101.0 W
Lamp Current (EM) (Nom)	0.119 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	2800 V
Re-Ignition Time (Min) (Max)	120 s
Ignition Time (Max)	5 s
Voltage (Max)	115 V
Voltage (Min)	85 V
Voltage (Nom)	100 V
Controls and Dimming	
Dimmable	Yes
Run-Up Time 90% (Max)	4 min
Mechanical and Housing	
Bulb Finish	Clear
Cap-Base Information	-
Approval and Application	
Energy Efficiency Label (EEL)	A+

Mercury (Hg) Content (Nom)	16.3 mg
Energy Consumption kWh/1000 h	110 kWh
Luminaire Design Requirements	
Bulb Temperature (Max)	450 °C
Cap-Base Temperature (Max)	250 °C
Product Data	
Full product code	871150019230115
Order product name	MASTER SON-T PIA Plus 100W/220 E40 1SL/12
EAN/UPC - Product	8711500192301
Order code	928151709230
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928151709230
Net Weight (Piece)	0.128 kg
ILCOS Code	ST-100-H/S-E40

Dimensional drawing





SON-T Plus 100W/220 E40

Product	D (max)	O	L	C (max)
MASTER SON-T PIA Plus 100W/220 E40 1SL/12	48 mm	47 mm	132 mm	210 mm


MASTER SON-T PIA Plus

Photometric data

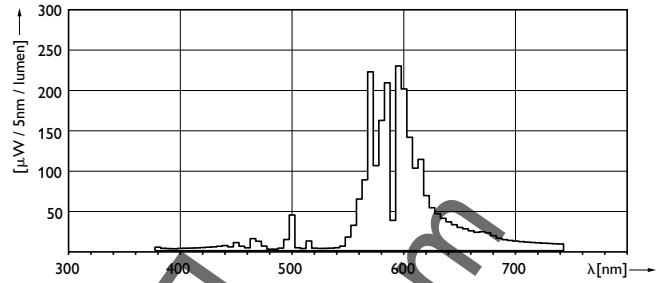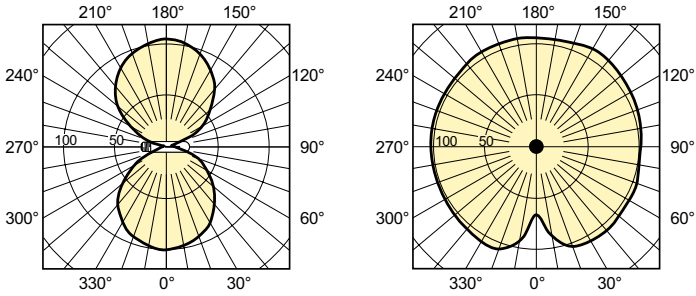


LDLD_SON-TPIA-Light distribution diagram

LDPB_SON-TPIA_0012-Spectral power distribution B/W

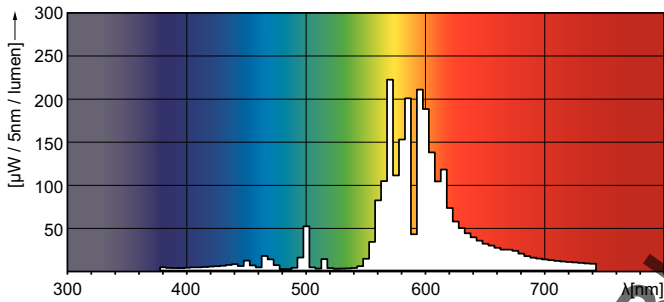


LDPO_SON-TPIA_0012-Spectral power distribution Colour

Lifetime

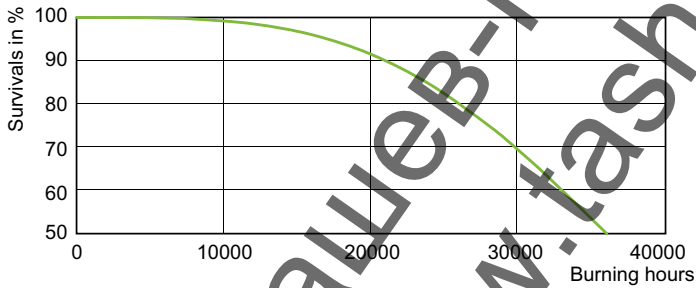

LDLE_SON-TPIA_0002-Life expectancy diagram

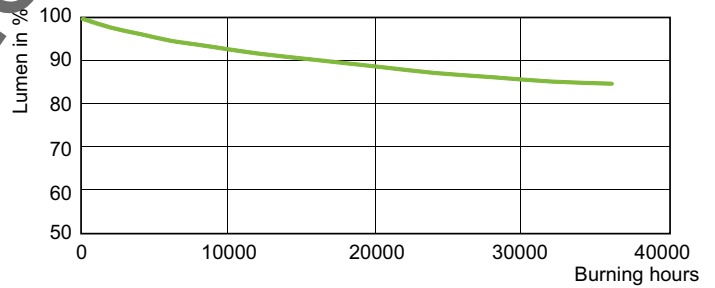

LDLM_SON-TPIA_0005-Lumen maintenance diagram

Ташев-Галвинг ООД
www.tashev-galving.com

