



# **MASTER TL-D Eco**

# MASTER TL-D Eco 32W/840 SLV/25

The MASTER TL-D Eco lamp offers the same light output as a MASTER TL-D Super 80 lamp, while using less energy, thanks to the use of specific phosphors and a special gas filling. Application areas are schools, offices, governmental buildings and healthcare environments.

## **Warnings and Safety**

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### **Product data**

General Information	9 5
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	12000 h
Life to 50% Failures (Nom)	15000 h
Life to 50% Failures Preheat (Nom)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	89 %
LSF 16000 h Rated	33 %
LSF 20000 h Rated	2%
Light Technical	
Color Code	840 [ CCT of 4000K]
Luminous Flux (Nom)	3000 lm
Luminous Flux (Rated) (Nom)	2650 lm
Color Designation	Cool White (CW)

Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	82 lm/W
Color Rendering Index (Nom)	>80
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %
Operating and Electrical	
Power (Nom)	32.2 W
Lamp Current (Nom)	0.448 A
Temperature	
Design Temperature (Nom)	30 ℃

Datasheet, 2020, March 19 data subject to change

# **MASTER TL-D Eco**

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	Green Cap
Approval and Application	
Energy Efficiency Label (EEL)	А
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	39 kWh
Product Data	
Full product code	871150026462640


Order product name	MASTER TL-D Eco 32W/840 SLV/25
EAN/UPC - Product	8711500264626
Order code	927921184023
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927921184023
Net Weight (Piece)	135.000 g
ILCOS Code	FD-32/40/1B-E-G13-26/1200

B (min)

1199.4 mm 1206.5 mm 1204.1 mm 1213.6 mm

C (max)


# Dimensional drawing



# TL-D Eco 32W/840

# Photometric data

LDPB\_TL-D8ECO\_840-Spectral power distribution

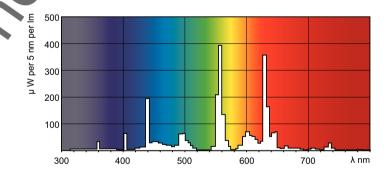


LDPO\_TL-D8ECO\_840-Spectral power distribution Colour

W/840 SLV/25

# **MASTER TL-D Eco**

## Lifetime

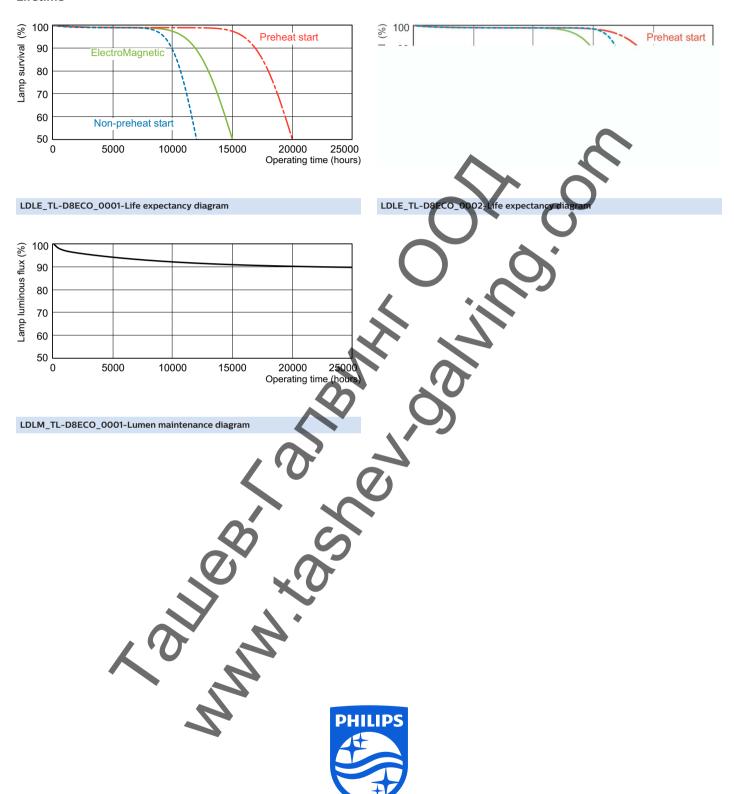

© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.