



# MASTER TL5 High Efficiency

MASTER TL5 HE 14W/840 SLV/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

## Benefits

### • General Information

Cap base	G5 [ G5]
Bulb shape	T5 [ 16 mm (T5)]
Life to 50% failures preheat (nom.)	24000 h
Features	na [ Not Applicable]
System description	High Efficiency
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	97 %
LSF Preheat 20000 h Rated	84 %

### • Light Technical

Lamp Luminous Flux 25°C EL (Nom)	1350 lm
Lamp Luminous Flux (Nom)	1200 lm
Colour Designation	Cool White (CW)
Luminous efficacy (@ max. lumen, rated) (nom.)	99 lm/W
Chromaticity coordinate X (nom.)	380
Chromaticity coordinate Y (nom.)	380
Colour Temperature, horizontal (Nom)	4100 K

Lamp Luminous Efficacy EM (Nom)	86 lm/W
Colour Rendering Index,horiz (Max)	85
Colour Rendering Index,horiz (Min)	80
Colour Rendering Index,horiz (Nom)	82
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

### • Operating and Electrical

Power (Rated) (Nom)	14 W
Lamp current (nom.)	0.165 A

### • Temperature

Design temperature (nom.)	35 °C
---------------------------	-------

### • Controls and Dimming

Dimmable	yes
----------	-----

### • Mechanical and Housing

Cap base information	Green Plate
----------------------	-------------

**PHILIPS**

# MASTER TL5 High Efficiency

## Approval and Application

Energy efficiency label (EEL)	A+
Mercury (Hg) content (nom.)	1.4 mg
Energy Consumption kWh/1000 h	15 kWh

## Product Data

Full product code 871150063940055


Order product name	MASTER TL5 HE 14W/840 SLV/40
EAN/UPC – product	8711500639400
Order code	927926084055
Numerator – quantity per pack	1
Numerator – packs per outer box	40
Material no. (12NC)	927926084055
Net weight (piece)	40.730 g
ILCOS Code	FDH-14/40/1B-L/P-G5-16/550

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing

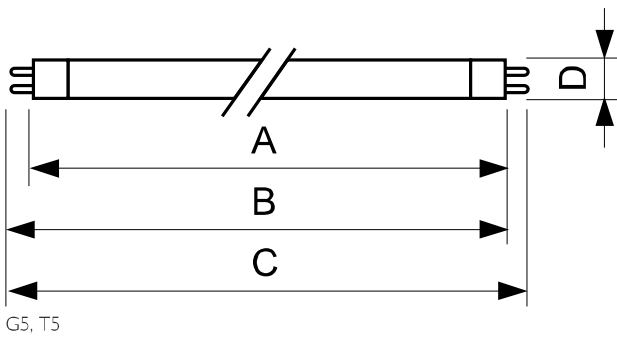

## TL5 14W/840/GP HE

Product	D	A	B	B	C
MASTER TL5 HE 14W/840 SLV/40	17 mm	549,0 mm	556,1 mm	553,7 mm	563,2 mm

## Photometric data

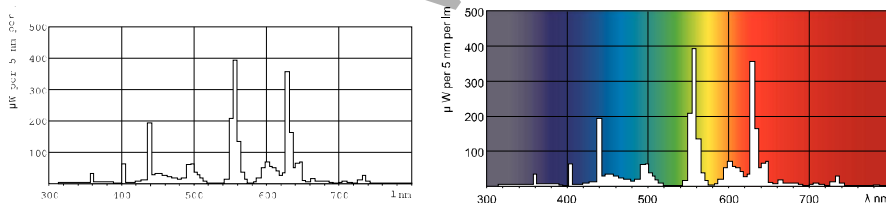

Ташев-Галвинг ООД  
[www.tashev-galving.com](http://www.tashev-galving.com)



© 2015 Philips Lighting Holding B.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, December 28  
data subject to change

Ташев-Галвинг ООД  
[www.tashev-galving.com](http://www.tashev-galving.com)