



# MASTER TL5 High Output

MASTER TL5 HO 54W/840 1SL

This TL5 lamp (tube diameter 16 mm) offers high light output. The TL5 HO lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

## Product data

### • General Characteristics

System Description	High Output
Cap-Base	G5
Cap-Base Information	Green Plate
Bulb	T5 [16 mm]
Life to 50% fail	24000 hr
Preheat EL,3h	
Life to 10% fail	19000 hr
Preheat EL,3h	
LSF HF Preheat	84 %
20000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
2000h Rated,3h	

Luminous Flux Lamp	5000 Lm
EL 35°C	
Lum Efficacy Rated	82 Lm/W
HF 25°C	
Lum Efficacy Rated	93 Lm/W
HF 35°C	
LLMF HF 20000h	90 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 2000h	96 %
Rated	
Luminous Flux EL	4450 Lm
25°C, Rated	
Luminous Flux EL	4450 Lm
25°C, Nominal	
Design Temperature	35 C

### • Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering Index	85 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Chromaticity	380 -
Coordinate X	
Chromaticity	380 -
Coordinate Y	

### • Electrical Characteristics

Lamp Wattage	54 W
Lamp Voltage EL	120 V
25°C	
Lamp Current EL	0.455 A
25°C	
Dimmable	Yes
Lamp Wattage EL	53.8 W
35°C	



asimpleswitch.com

# PHILIPS

sense and simplicity

Ташев Галвинг ООД  
www.tashev-galving.com

# MASTER TL5 High Output

Lamp Current EL 35°C	0.460 A
Lamp Voltage EL 35°C	118 V
Lamp Wattage EL 25°C, Rated	54.1 W
Lamp Wattage EL 25°C, Nominal	54 W

Insertion Length B	1153.7 (min), 1156.1 (max) mm
Overall Length C	1163.2 (max) mm
Diameter D	17 (max) mm

• Product Data

Order code	643186 55
Full product code	871150064318655
Full product name	MASTER TL5 HO 54W/840 1SL
Order product name	MASTER TL5 HO 54W/840 1SL/40
Pieces per pack	1
Packing configuration	40
Packs per outerbox	40
Bar code on pack - EAN1	8711500643186
Bar code on outerbox - EAN3	8711500868831
Logistic code(s) - 12NC	927929084055
ILCOS code	FDH-54/40/1B-L/P-G5-16/1150
Net weight per piece	104.500 gr

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.4 mg

• Measuring Conditions

Calibration Current HF Generator Rated Voltage Resistor	0.460 A 235 V 255 ohm
---	-----------------------------



• Product Dimensions

Base Face to Base Face A	1149.0 (max) mm
--------------------------	-----------------

Dimensional drawing



G5, T5

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HO 54W/840	1149.0	1153.7	1156.1	1163.2	17

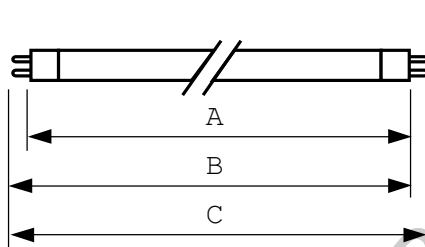

G5

## Photometric data

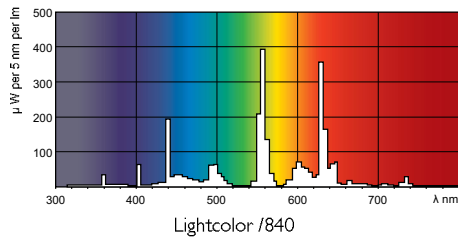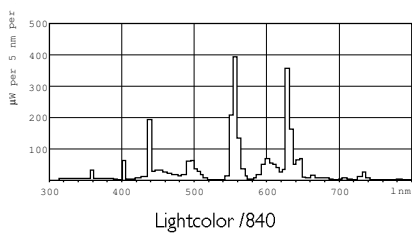

Ташев-Галвинг ООД  
www.tashev-galving.com



© 2012 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2012, August 4  
data subject to change

Ташев Галвинг ООД  
[www.tashev-galving.com](http://www.tashev-galving.com)