

## MASTER TL5 High Output

MASTER TI 5 HO 80W/840 SI V/40

This TL5 lamp (tube diameter 16 mm) offers high light output. The TL5 HO lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

## Product data

| • General | Information     |
|-----------|-----------------|
| * General | IIIIOI IIIauoii |

G5 [ G5] T5 [ 16 mm (T5)] Cap-Base Bulb Shape Life To 50% Failures 30000 h Preheat (Nom) **Features** HO Alto® System Description High Output LSF Preheat 2000 h 99% Rated LSF Preheat 4000 h 99 % Rated LSF Preheat 6000 h 99 % Rated 99 % LSF Preheat 8000 h Rated LSF Preheat 16000 h 97% Rated LSF Preheat 20000 h 84 % Rated

• Light Technical

Color Code Luminous Flux (Nom) Luminous Flux (Rated) (Nom) Color Designation Luminous Efficacy (@ Max Lumen, Rated) (Nom) Chromaticity Coordinate X (Nom) Chromaticity Coordinate Y (Nom) Correlated Color

Temperature (Nom)

840 [ CCT of 4000K (841)] 7000 lm

6550 Im

Cool White (CW) 88 lm/W

380

380

4100 K

|                 | from offices and inc                            | lustry to sch    |
|-----------------|---|------------------|
|                 |   |                  |
|                 | Luminous Efficacy                               | 82 lm/W          |
| n (T5)]         | (rated) (Nom)<br>Color Rendering<br>Index (Max) | 85               |
|                 | Color Rendering<br>Index (Min)                  | 80               |
| ıt /            | Color Rendering<br>Index (Nom)                  | 82               |
|                 | LLMF 2000 h Rated                               | 96 %             |
|                 | LLMF 4000 h Rated                               | 95 %             |
|                 | LLMF 6000 h Rated<br>LLMF 8000 h Rated          | 94 %<br>93 %     |
| 40 60           | LLMF 12000 h Rated                              | 93 %<br>92 %     |
|                 | LLMF 16000 h Rated                              | 91 %             |
| W XO            | LLMF 20000 h Rated                              | 90 %             |
| Y               | Operating and Electrica                         | al               |
| 0, 2            | Power (Rated)<br>(Nom)                          | 79.8 W           |
| 12              | Lamp Current (Nom)<br>Voltage (Nom)             | 0.530 A<br>152 V |
| of 4000K (841)] | <b>3</b> ( )                                    |                  |
|                 | <ul> <li>Temperature</li> </ul>                 |                  |
|                 | Design Temperature                              | 35 °C            |

Design Temperature 35 °C (Nom)

• Controls and Dimming Dimmable Yes

· Mechanical and Housing

Cap-Base Information Green Plate



## MASTER TL5 High Output

· Approval and Application

**Energy Efficiency** 

Label (EEL) Mercury (Hg)

1.4 mg

Content (Nom)

**Energy Consumption** 

88 kWh

kWh/1000 h

• Product Data

Full product code

871150071045155

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

Order product name EAN/UPC - Product MASTER TL5 HO 80W/840 SLV/40

8711500710451 927929584057

Order code Numerator - Quan-

tity Per Pack Numerator - Packs 40

per outer box Material Nr. (12NC) 927929584057 Net Weight (Piece)

128.700 g FDH-80/40/1B-L/P-G5-16/1450 ILCOS Code


remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing


TL5 HO 80W/840

Product

1449.0 mm 1456.1 mm 1453.7 mm 1463.2 mm

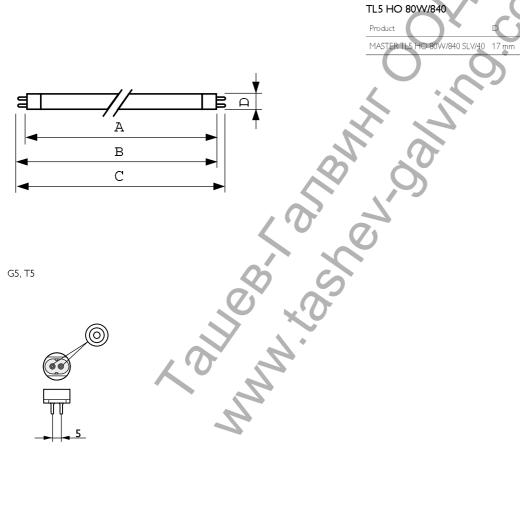



G5, T5





## Photometric data









© 2016 Philips Lighting Holding B.V. All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.