



Mosaic™ 10 AX Controls


Cat. Nos: 0 770 14/00L/01L/10L/11L/21L
0 791 01L/11L - 0 792 01L/11L/21L



0 770 01L



0 770 11L

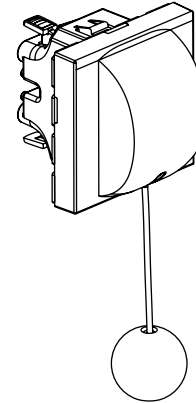

0 770 14


1. USE

Mosaic Easy-Led controls.
A mechanism allows you to create an LED or standard function.
Can become illuminated with plug-in indicator Cat. No. 0 676 86L (230 V) or Cat. No. 0 676 87L (12, 24, 48 V).
Can become indicator with plug-in indicator Cat. No. 0 676 85L (230 V) or Cat. No. 0 676 89L (12, 24, 48 V).
Flush or surface-mounting.
To be fitted with finishing plates.

2. RANGE

| Description | White | Alu | Matt black |
|---|-----------|-----------|--------------|
| Our mechanism allows you to create an LED or standard function | | | |
| Mosaic Easy-Led one way switch - 1 module | 0 770 00L | - | - |
| Mosaic Easy-Led two-way switch - 1 module | 0 770 01L | 0 792 01L | 0 791 01L |
| Mosaic Easy-Led one way switch- 2 modules | 0 770 10L | - | - |
| Mosaic Easy-Led two way switch - 2 modules | 0 770 11L | 0 792 11L | 0 791 11L |
| Mosaic Easy-Led Intermediate switch - 2 modules | 0 770 21L | 0 792 21L | - |
| Description | | | White |
| Pull-cord two-way switch - 2 modules Supplied with 1.5 m cord | | | 0 770 14 |

3. DIMENSIONS (mm)

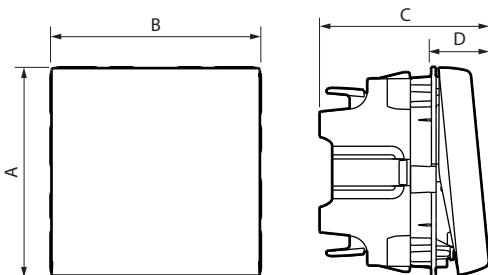

| Cat. Nos. | A | B | C | D |
|---------------------------------------|----|------|------|------|
| 0 770 00L/01L - 0 792 01L - 0 791 01L | 45 | 22.5 | 36.5 | 12.5 |
| 0 770 10L/11L - 0 792 11L - 0 791 11L | 45 | 45 | 36.5 | 12.5 |
| 0 770 21L - 0 792 21L | 45 | 45 | 42.5 | 12.5 |
| 0 770 14 | 45 | 45 | 50.5 | 22 |

4. CONNECTION

Automatic terminals
Terminal capacity: 2 x 2.5 mm²
Stripping length: 12 mm

5. TECHNICAL CHARACTERISTICS

- **5.1 Mechanical characteristics**
Impact tests: IK 04
Penetration by solid/liquid matter: IP 31 D
- **5.2 Material characteristics**
Mechanism casing: PC
Catch pin: PC
Rocker plates:
White RAL 9003 ABS + opalescent white PC
Painted glittery varnished aluminium ABS + opalescent grey PC
Painted satin-finish matt black RAL 9017 ABS + transparent smoked black PC
Halogen-free
UV-resistant
Self-extinguishing:
850°C/30 s for insulating components holding live parts in place.
650°C/30 s for other insulating components.
- **5.3 Electrical characteristics**
Voltage: 250 V~
Current: 10 AX
Max. power for self-ballasted lamps: 100 W
- **5.4 Climate characteristics**
Storage temperature: -10°C to +70°C
Usage temperature: -5°C to +35°C

6. CARE

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Resistant to the following products: Hexane (EN60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes

Caution: Always test before using other special cleaning products.