

Photo-cell controller

NightMatic 2000

white

EAN 4007841 550417



Twilight switch

1000w

1000 W max.
(LED-ready)



IP54



2 - 30 lux



energy saving



3 JAHRE
HERSTELLER
GARANTIE
steinel.de/warranty

manufacturer's
warranty
steinel.de/garantie



CE



TÜV Nord
Baumuster
checked

Function description

Automatic illumination. Photo-electric lighting controller NightMatic 2000 for controlling lighting systems for building fronts, properties, shop windows etc., automatically switches light 'ON' at dusk automatically 'OFF' again at dawn.

Technical specifications

Type	Photo-cell controller	Constant-lighting control	No
Dimensions (L x W x H)	37 x 74 x 99 mm	Basic light level function	No
Mains power supply	230 – 240 V / 50 Hz	Settings via	Potentiometers
Power consumption	0,8 W	Interconnection	Yes
Sensor Technology	Light sensor	Type of interconnection	Master/master
Application, place	Outdoors	IP-rating	IP54
Installation site	wall	Material	Plastic
Installation	Surface wiring	Ambient temperature	-20 – 50 °C
Twilight setting TEACH	Yes	Application, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway
Twilight setting	2 – 30 lx	Colour	white
Switching output 1, resistive	1000 W	Colour, RAL	9010
Switching output 1, number of LEDs / fluorescent lamps	4 pcs	Manufacturer's Warranty	3 years
Fluorescent lamps, uncorrected	500 VA	Version	white
Capacitive load in µF	88 µF	PU1, EAN	4007841550417

Photo-cell controller


NightMatic 2000

white

EAN 4007841 550417



Dimension Drawing

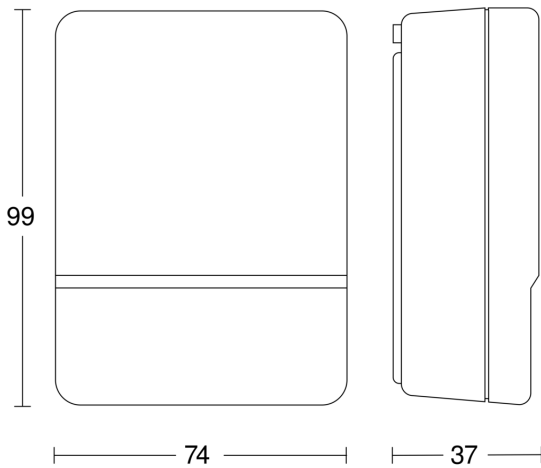

Ташев-Галвинг ООД
www.tashev-galving.com