


Прекъсвач АВВ мощностен автоматичен тип А-1 3Р, 160 А, 690 V, 3-25 kA, Tmax XT1B 160 TMD 125-1250 3p F F



Type of circuit-breaker	XT1			
Frame	125			
Poles	3,4			
Rated ultimate short-circuit breaking capacity	N	S	H	
(AC) 50-60 Hz 240 V [kA]	50	65	100	
(AC) 50-60 Hz 480 V [kA]	25	35	65	
(AC) 50-60 Hz 600Y/347 V [kA]	18	22	25	
(AC) 50-60 Hz 600 V [kA]	—	—	—	
(DC) 250 V-2 poles in series [kA]	35	42	50	
(DC) 500 V-3 poles in series [kA]	—	—	—	
(DC) 500 V-4 poles in series [kA]	35	50	50	
(DC) 600 V-3 poles in series [kA]	—	—	—	

Caption

- ① Insulating plate obligatory
- ② Overall dimension of optional wiring ducts
- ③ 25mm insulating barriers between phases (compulsory) provided
- ④ Front carter obligatory for through door of the panel $\leq 25\text{mm}/0,98"$

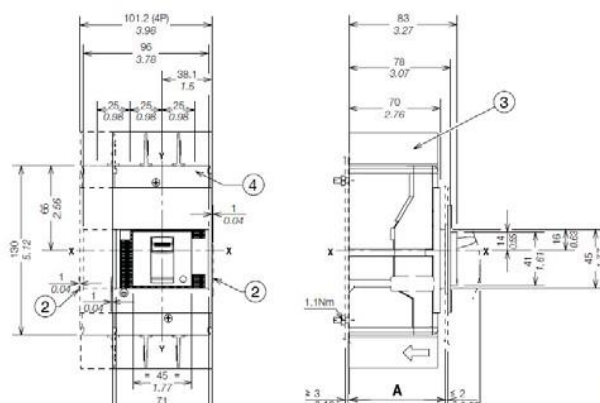

Продукт: [Прекъсвач АВВ мощностен автоматичен тип А-1 3Р, 160 А, 690 V, 3-25 kA, Tmax XT1B 160 TMD 125-1250 3p F F](#)

Категория: [Мощностни автоматични прекъсвачи](#)

Бранд: [ABB](#)

Категория бранд: [Прекъсвач АВВ](#)

Ташев-Галвинг ООД
www.tashev-galving.com