

QT-FIT8 2X58...70/220...240

QUICKTRONIC FIT 8 | ECG for FL 26 mm



- Suitable for use in emergency lighting systems as per EN 50172/DIN VDE 0108-100

Product benefits

- Perfect lamp start for applications with motion sensors
- Automatic restart after lamp replacement

Product features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 0 Hz, 50 Hz...60 Hz
- Lamp start with optimum filament preheating
- Automatic shutdown of defective lamps and at end of life (EoL)
- Safety: to EN 61347-2-3
- Lamp operation: to EN 60929
- RI suppression: to EN 55015:2006+A1:2007+A2:2009/CISPR 15
- Line harmonics: to EN 61000-3-2
- Immunity: to EN 61547


Technical data

Electrical data

Nominal voltage	220...240 V
Mains frequency	50...60 Hz
DC voltage	198...264 V
Operating frequency	40...50 kHz

Dimensions & weight

Length	360.0 mm
Width	30.0 mm
Height	28.0 mm
Mounting hole spacing, length	350.0 mm
Product weight	264.00 g
Cable cross-section, output side	0.5...1.5 mm ²
Cable cross-section, input side	0.5...1.5 mm ²

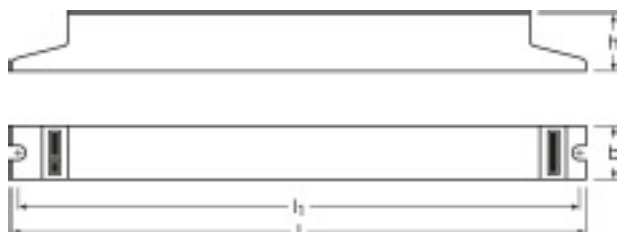

Product line drawing with letters

Temperatures

Ambient temperature range	-15...+50 °C
---------------------------	--------------

Capabilities

Dimmable	No
Suitable for fixtures with prot. class	I

Certificates & standards

Approval marks – approval	VDE / VDE-EMC / ENEC 10 / CE
EEI – Energy Label	A2
Standards	acc. to EN 61347-2-3 / acc. to EN 60929 / acc. to EN 55015:2006 + A1:2007 / acc. to EN 61000-3-2 / acc. to EN 61547

Lamp-ECG combination (System)

L 51 W ES

Ambient temperature range	+10...+50 (°C)
---------------------------	----------------

Products

L 51W/830 ES


L 51W/840 ES

L 58 W

Ambient temperature range	-15...+50 (°C)
---------------------------	----------------

Products

L 58W/530
L 58W/535
L 58W/60
L 58W/62
L 58W/640
L 58W/66
L 58W/67
L 58W/76
L 58W/76 SPS
L 58W/765
L 58W/77
L 58W/827
L 58W/830
L 58W/835
L 58W/840
L 58W/840 SPS
L 58W/850
L 58W/860
L 58W/865
L 58W/880 SKYWHITE
L 58W/930
L 58W/940
L 58W/940 UVS
L 58W/950 COLOR PROOF
L 58W/954
L 58W/954 UVS
L 58W/965
L 58W/965 BIOLUX

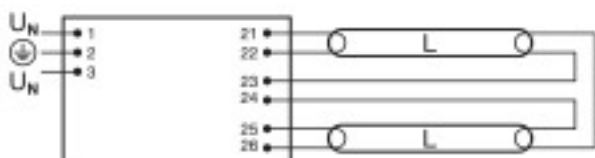

Wiring diagram

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4008321294289	Unpacked 1	28 mm x 32 mm x 360 mm	275.00 g	0.32 dm ³
4008321294296	Shipping carton box 20	161 mm x 131 mm x 391 mm	5941.00 g	8.25 dm ³

Ташев-Галвинг ООД
www.tashev-galving.com

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Ташев-Галвинг ООД
www.tashev-galving.com