

Motion detector

IS 240 DUO

black

EAN 4007841 602710



infrared sensor
240°



max. 12 m

1000w

1000 W max.
(LED-ready)



IP54



160° horizontal



2 – 2000 lux



10 sec – 15 min



Ideal 2 m



energy saving



3 JAHRE
HERSTELLER
GARANTIE
steinel.de/garantie

Function description

Round the corner. Infrared wall sensor IS 240 DUO, for indoors and out, 240° angle of coverage, reach up to 12 m, selectable time and twilight threshold, detection zone can be customised with shrouds.

Technical specifications

Type	Motion detectors	Time setting	10 s – 15 Min.
Dimensions (L x W x H)	100 x 60 x 90 mm	Switching output 1, resistive	1000 W
Mains power supply	230 – 240 V / 50 Hz	Switching output 1, number of LEDs / fluorescent lamps	6 pcs.
Sensor Technology	passive infrared	Capacitive load in µF	132 µF
Application, place	Indoors, Outdoors	Constant-lighting control	No
Installation site	wall, corner	Basic light level function	No
Installation	Surface wiring	Settings via	Potentiometers
Mounting height	1,80 – 4,00 m	With remote control	No
Reach, radial	r = 5 m (52 m²)	Interconnection	Yes
Reach, tangential	r = 12 m (302 m²)	Type of interconnection	Master/master
Detection angle	240 °	IP-rating	IP54
Angle of aperture	180 °	Material	Plastic
Switching zones	276 switching zones	Ambient temperature	-20 – 50 °C
Optimum mounting height	2 m	Application, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway
Mechanical scalability	No	Colour	black
Sneak-by guard	Yes	Colour, RAL	9005
Capability of masking out individual segments	Yes	Manufacturer's Warranty	3 years
Electronic scalability	No	Version	black
Twilight setting TEACH	No	PU1, EAN	4007841602710
Twilight setting	2 – 2000 lx		

Motion detector

IS 240 DUO

black

EAN 4007841 602710




Accessories

EAN 4007841 630119

Corner wall mount 01

Detection Zone

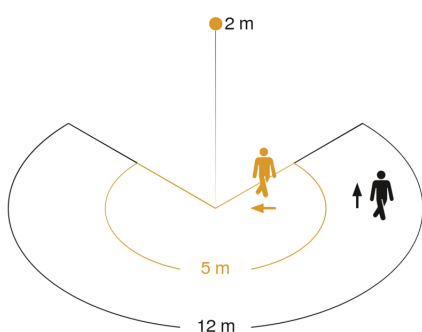

Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

