


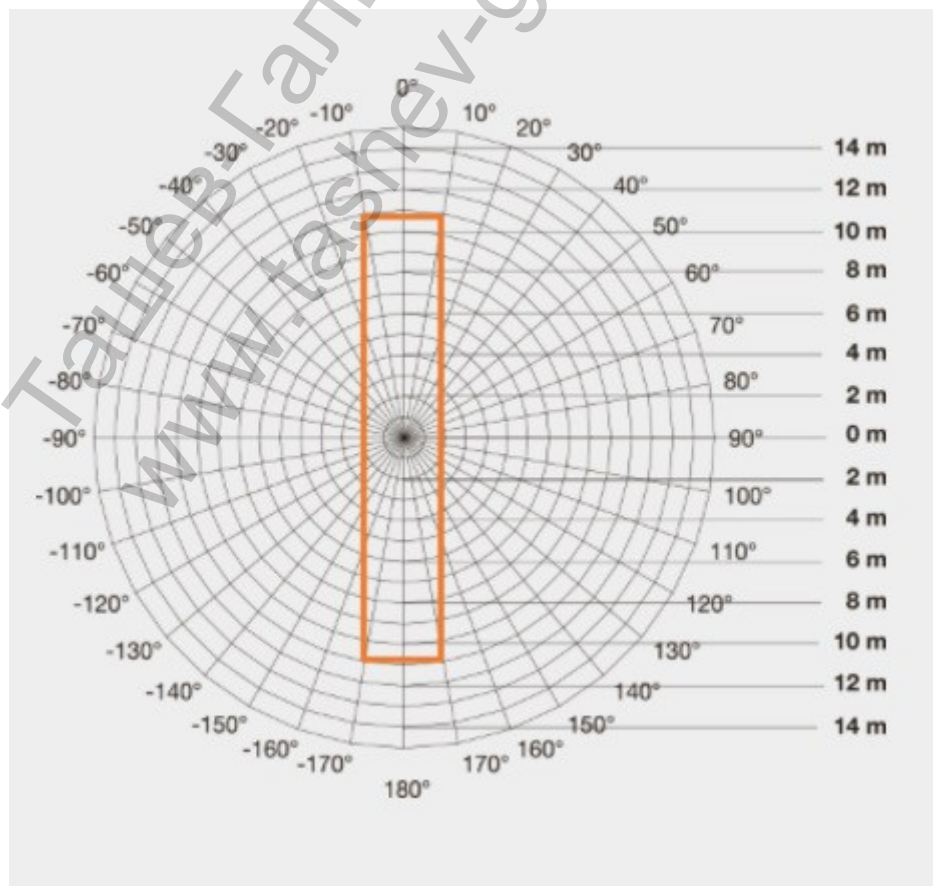

| Technical specifications Dual US COM1        |                                             |
|----------------------------------------------|---------------------------------------------|
| European Article Number (EAN)                | 4007841007843                               |
| Model                                        | Presence detector                           |
| Dimensions(w x h x d)                        | 120 x 120 x 73 mm                           |
| Voltage                                      | 220-240 V, 50/60 Hz                         |
| Application                                  | inside buildings                            |
| Installation                                 | Ceiling                                     |
| Recommended installation height              | 2.5-3.5 m                                   |
| Detection angle                              | 360°                                        |
| Creep-under protection                       | Yes                                         |
| Reach                                        | 3 x 20 m                                    |
| User-friendly setting capability             | Teach-in (with optional remote control RC8) |
| Light-level setting                          | 10 – 1000 lux, ∞/daylight                   |
| Light-level setting DIM                      | 100 - 1000 lx<br>∞ / daylight               |
| Response brightness                          | 10-1000 lx                                  |
| Teach-function for response value luminosity | Yes                                         |
| Parallel-connected configurations            | Master/slave<br>Master/master               |
| Can be connected in parallel                 | Yes                                         |
| Degree of protection (IP)                    | IP20                                        |
| Protection class                             | II                                          |
| Temperature                                  | -25-+55 °C                                  |
| IQ mode                                      | Yes                                         |
| Housing                                      | UV-resistant plastic, paintable             |
| Model                                        | COM1                                        |