


Laserliner®

ELECTRONIC MEASURING TOOLS

HIGH VISIBILITY

Digital slope indicators and digital spirit levels

MasterLevel Box Pro

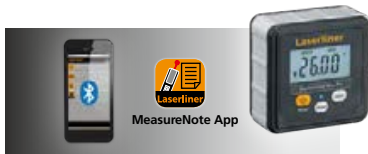

- Practical, digital slope indicators with Bluetooth interface**
- Angles can be transferred in reference mode.
 - The flip-display feature changes the display automatically when making overhead measurements.
 - Bluetooth interface for measurement data transfer
 - Calibration function to recalibrate the sensor and increase the measuring accuracy
 - Powerful adhesion magnets
 - Hold function
 - Compact in mini format


Angle display:	360° (4 x 90°)
Accuracy of electronic measurements:	± 0.05° at 0°...1° ± 0.05° at 89°...90° ± 0.1° at 1°...89°

Inclusive: MasterLevel Box Pro, softbag, battery

ORDER NO.	EAN-CODE	PU
081.262A	4 021563 700233	2



MasterLevel Compact Plus

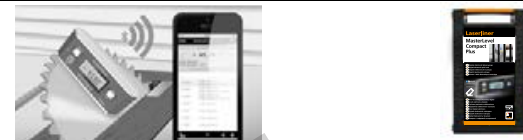

- Digital slope indicators in compact format with Bluetooth interface**
- An acoustic signal is sounded at 0° and 90° as an aid to ease the alignment of objects.
 - Angles can be transferred in reference mode.
 - The flip-display feature changes the display automatically when making overhead measurements
 - Bluetooth interface for measurement data transfer
 - Calibration function to recalibrate the sensor and increase the measuring accuracy
 - V-groove, for holding on pipes
 - Powerful adhesion magnets
 - Hold function

Angle display:	360° (4 x 90°)
Accuracy of electronic measurements:	± 0.05° at 0°...1° ± 0.05° at 89°...90° ± 0.1° at 1°...89°

Inclusive: MasterLevel Compact Plus, batteries, carrying case

ORDER NO.	EAN-CODE	PU
081.265A	4 021563 702626	2



DigiLevel Laser



- Digital electronic spirit level with green laser technology**
- DLD technology creates an extremely bright, green laser line.
 - An acoustic signal is sounded at 0°, 45°, 90°, 135° and 180° as an aid to ease the alignment of objects.
 - Angles can be transferred in reference mode.
 - The flip-display feature changes the display automatically when making overhead measurements
 - Calibration function to recalibrate the sensor and increase the measuring accuracy
 - Powerful adhesion magnets on the underside, milled measuring surface, additional vertical and horizontal vial
 - Hold function

Angle display:	360° (4 x 90°)
Accuracy of electronic measurements:	± 0.1° at 0°...1° ± 0.1° at 89°...90° ± 0.2° at 1°...89°

Vial precision: ± 0.5 mm / m

Inclusive: DigiLevel Laser, softbag, batteries

ORDER NO.	EAN-CODE	PU
G40 cm 081.255A	4 021563 704064	5
G80 cm 081.257A	4 021563 704088	5



DigiLevel-Laser G40 / G80
Length 40 / 80 cm

* Approx. 6 times brighter than a typical red 630 - 660 nm laser

