


## SEMPERIT

### SEMPERPAC 2 SN-K



Compact Hydraulic Hose construction exceeds DIN EN 857 2SC and SAE 100 R16-S  
Higher Pressure at reduced bend radii

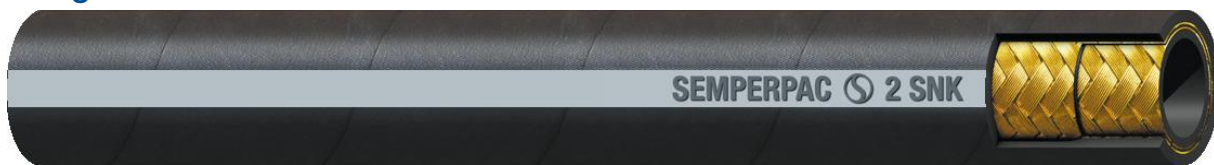

#### HOSE :

Tube	Synthetic rubber, resistant against hydraulic fluids (HL, HLP, HLPD, HVLP, HFA, HFAS, HFB, HFC)
Reinforcement	Two braids of high tensile steel wire
Cover	Abrasion and ozone resistant synthetic rubber Note: various covers available
Temperature range	-40° C to 100° C / -40° F to +212° F (max 120° C/248° F intermittent)
Standard branding	embossed

SEMPERPAC  2SN-K DN10 3/8" - EXCEEDS EN 857 2SC - EXCEEDS SAE 100 R16-S WP 385 5585 PSI . Q . . W . . z 

**Impulse tested up to 1.000.000 Cycles!\***

Nominal Ø		Inside Ø	Braid Ø	Outside Ø	Working pressure		Test pressure	Burst pressure	Bend radius	Weight
mm	inch	mm	mm	mm	bar	psi	bar	bar	mm	kg/m
6	1/4	6,6	11,4	13,4	450	6525	900	1800	45	0,27
8	5/16	8,3	13,0	15,0	420	6090	840	1680	60	0,31
10	3/8	9,9	14,9	17,0	385	5585	770	1540	70	0,39
12	1/2	13,0	18,7	20,7	350	5075	700	1400	90	0,52
16	5/8	16,4	21,9	23,6	290	4205	580	1160	130	0,61
19	3/4	19,5	25,7	27,7	280	4060	560	1120	160	0,79
25	1	26,0	32,9	35,6	200	2900	400	800	210	1,15
31	1-1/4	32,5	40,5	43,5	175	2540	350	700	300	1,57