


Ключ глух - 215/2

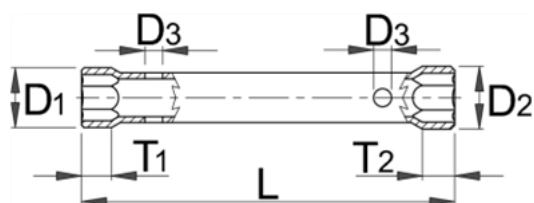

Описание

- материал: хром-молибден
- ковани, изцяло закалени
- хромиран в съответствие със стандарт EN 12540
- изработен в съответствие със стандарт DIN 896 (само за метрични размери)

Технически параметри

		L	D1	D2	D3	T1	T2				
6006 96	6 x 7	105	10	11.2	6.3	8	8	28	4A	10	-
6006 97	8 x 9	105	12.7	14	6.3	9	9	39	4A	10	-
6006 98	8 x 10	120	12.8	15	6.3	8	8	64	4A	10	-
6006 99	10 x 11	120	15.5	16.7	6.3	10	10	64	4A	10	-
6007 00	12 x 13	140	18.2	19.5	8.5	12	12	104	4A	10	-
6007 17	13 x 17	150	20	24.6	10.5	13	13	144	4A	10	-
6007 01	14 x 15	140	21.2	22.3	8.5	14	14	134	4A	10	-
6007 18	14 x 17	150	21.2	24.6	10.5	13	13	142	4A	10	-
6007 02	16 x 17	150	23.5	24.6	10.5	15	15	158	4A	10	-
6079 57	16 x 18	100	23.5	25.8	10.5	14	14	118	4A	10	-
6007 19	17 x 19	160	24.6	27	12.5	16	16	183	4A	10	-
6079 58	17 x 21	165	24.6	29.3	12.5	16	16	199	4A	10	-
6007 03	18 x 19	155	25.8	27	12.5	16	16	184	4A	10	-
6050 43	18 x 21	160	25.8	29.3	12.5	16	16	165	4A	10	-
6050 44	19 x 22	170	27	31.4	12.5	18	18	266	4A	10	-
6079 60	19 x 24	160	27	33.7	14.5	20	20	230	4A	10	-
6007 05	20 x 22	165	29	31.4	12.5	18	18	269	4A	10	-
6007 06	21 x 23	165	30.3	32.5	14.5	20	20	282	4A	5	-
6079 62	22 x 24	160	31.4	33.7	14.5	20	20	299	4A	5	-
6007 07	24 x 26	180	33.7	36	14.5	22	22	356	4A	5	-
6007 23	24 x 27	190	33.7	37.2	14.5	22	22	374	4A	5	-
6007 08	25 x 28	200	34.8	38.3	16.5	24	24	432	1E	5	-
6079 64	27 x 29	200	38.1	40.5	16.5	25	25	521	1E	5	-
6176 33	27 x 30	200	38.1	41.6	16.5	25	25	528	1E	5	-
6007 09	27 x 32	200	38.1	44	16.5	27	27	536	1E	5	-
6025 57	30 x 32	200	41.6	44	16.5	27	27	585	1E	5	-
6031 28	30 x 36	215	42.6	49.6	18.5	28	28	730	1E	5	-
6031 29	36 x 41	215	51.6	57.4	18.5	31	31	1070	1E	5	-
6185 75	41 x 46	235	52	57	22	34	34	1555	1E	1	-
6185 76	46 x 50	235	59	63	22	68	68	2030	1E	1	-
6185 77	50 x 55	235	63	68	22	75	75	2030	1E	1	-

Информация за опаковането

		Опаковка за търговия на дребно						Транспортна опаковка			
		A	Б	Ц				A1	Б1	Ц1	
60069 6	6 x 7	150	44	12,3	35	4		65	211	38	215
60069 7	8 x 9	150	44	15	46	4		65	211	38	259
60069 8	8 x 10	170	44	17	71	4		65	211	38	359
60069 9	10 x 11	170	44	18	71	4		74	190	45	359
60070 0	12 x 13	190	44	21	111	4		74	190	45	519
60071 7	13 x 17	210	44	25,9	151	4		81	205	58	679
60070 1	14 x 15	200	44	23,8	141	4		74	190	45	639
60071 8	14 x 17	200	44	26,1	149	4		81	205	58	671
60070 2	16 x 17	200	44	25,9	165	4		81	205	58	735
60795 7	16 x 18	150	44	27,3	125	4		74	190	45	575
60071 9	17 x 19	210	44	28,5	190	4		81	205	58	835
60795 8	17 x 21	220	44	30,8	206	4		81	205	58	899
60070 3	18 x 19	210	44	28,5	191	4		81	205	58	839
60504 3	18 x 21	210	44	30,1	172	4		81	205	58	763
60504 4	19 x 22	220	58	32,9	279	4		113	242	77	1191
60796 0	19 x 24	210	58	35,2	243	4		113	242	77	1047
60070 5	20 x 22	230	58	32,9	282	4		113	242	77	1203
60070 6	21 x 23	220	58	34	295	4		113	242	77	1255
60796 2	22 x 24	210	58	35,2	312	4		209	225	44	1323
60070 7	24 x 26	240	58	37,5	369	4		209	254	54	1551
60072 3	24 x 27	250	58	38,7	387	4		209	254	54	1623
60070 8	25 x 28	325	80	38,3	432	1	-	-	-	-	-
60796 4	27 x 29	325	80	40,5	521	1	-	-	-	-	-
61763 3	27 x 30	325	80	41,6	528	1	-	-	-	-	-
60070 9	27 x 32	325	80	44	536	1	-	-	-	-	-
60255 7	30 x 32	325	80	44	585	1	-	-	-	-	-
60312 8	30 x 36	345	80	49,6	730	1	-	-	-	-	-
60312 9	36 x 41	345	100	57,4	1070	1	-	-	-	-	-
61857 5	41 x 46	395	100	58,6	1555	1	-	-	-	-	-
61857 6	46 x 50	395	150	63,8	2030	1	-	-	-	-	-
61857 7	50 x 55	395	150	68,45	2030	1	-	-	-	-	-