




ORFS FEMALE SWIVEL - 45° ELBOW

FEMMINA 45° ORFS
 FEMELLE 45° ORFS
 DK 45° BOGEN ORFS UNF STIRNDICHTEND
 HEMBRA GIRATORIA A 45° ORFS

* CRIMPED NUT
 DADO PINZATO

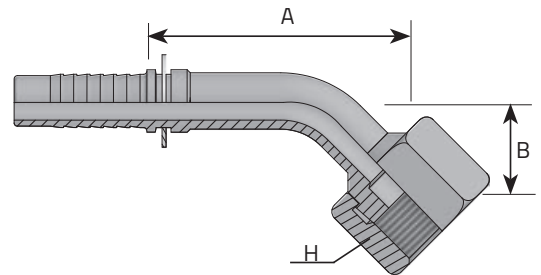

| Code | Tube | | Thread | | Dimensions | | | | Pressure | |
|---------------|------|--------|--------|----------|------------|----|------|------|----------|------|
| | D.N. | Hose | Diam | T | t/1" | H | B | A | Bar | Psi |
| | Inch | | mm | Inch | | mm | mm | mm | | |
| F45ORFS0406 | -4 | 1/4" | 6.4 | 9/16" | 18 | 17 | 15 | 45 | 450 | 6526 |
| F45ORFS0409 | -4 | 1/4" | 6.4 | 11/16" | 16 | 22 | 15.5 | 45.5 | 450 | 6526 |
| F45ORFS0411 | -4 | 1/4" | 6.4 | 13/16" | 16 | 24 | 18 | 49 | 450 | 6526 |
| F45ORFS0509 | -5 | 5/16" | 7.9 | 11/16" | 16 | 22 | 15.5 | 46 | 350 | 5076 |
| * F45ORFS0606 | -6 | 3/8" | 9.5 | 9/16" | 18 | 19 | 24 | 55 | 445 | 6454 |
| F45ORFS0609 | -6 | 3/8" | 9.5 | 11/16" | 16 | 22 | 13 | 51 | 445 | 6454 |
| F45ORFS0611 | -6 | 3/8" | 9.5 | 13/16" | 16 | 24 | 17 | 52 | 445 | 6454 |
| * F45ORFS0809 | -8 | 1/2" | 12.8 | 11/16" | 16 | 22 | 26 | 72 | 415 | 6019 |
| F45ORFS0811 | -8 | 1/2" | 12.8 | 13/16" | 16 | 24 | 18 | 58 | 415 | 6019 |
| F45ORFS0813 | -8 | 1/2" | 12.8 | 1" | 14 | 30 | 20 | 61 | 415 | 6019 |
| F45ORFS0814 | -8 | 1/2" | 12.8 | 1.3/16" | 12 | 36 | 24 | 62 | 415 | 6019 |
| F45ORFS1013 | -10 | 5/8" | 16 | 1" | 14 | 30 | 20 | 55 | 350 | 5076 |
| F45ORFS1014 | -10 | 5/8" | 16 | 1.3/16" | 12 | 36 | 21 | 57 | 350 | 5076 |
| F45ORFS1214 | -12 | 3/4" | 19 | 1.3/16" | 12 | 36 | 23 | 58 | 350 | 5076 |
| F45ORFS1215 | -12 | 3/4" | 19 | 1.7/16" | 12 | 41 | 27 | 62.5 | 350 | 5076 |
| * F45ORFS1614 | -16 | 1" | 25.4 | 1.3/16" | 12 | 36 | 43 | 96.5 | 280 | 4061 |
| F45ORFS1615 | -16 | 1" | 25.4 | 1.7/16" | 12 | 41 | 26 | 81 | 280 | 4061 |
| F45ORFS2021 | -20 | 1.1/4" | 31.8 | 1.11/16" | 12 | 50 | 34 | 93 | 210 | 3046 |
| F45ORFS2432 | -24 | 1.1/2" | 38.1 | 2" | 12 | 60 | 45 | 112 | 185 | 2683 |