




## ORFS FEMALE SWIVEL - 45° ELBOW

FEMMINA 45° ORFS  
 FEMELLE 45° ORFS  
 DK 45° BOGEN ORFS UNF STIRNDICHTEND  
 HEMBRA GIRATORIA A 45° ORFS

\* CRIMPED NUT  
 DADO PINZATO

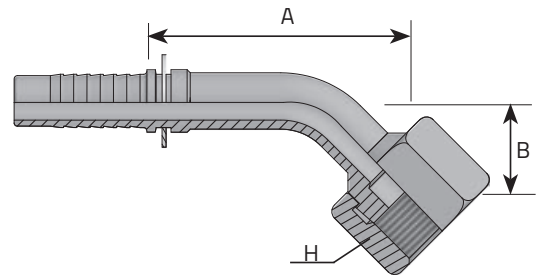

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
	Inch		mm	Inch		mm	mm	mm		
F45ORFS0406	-4	1/4"	6.4	9/16"	18	17	15	45	450	6526
F45ORFS0409	-4	1/4"	6.4	11/16"	16	22	15.5	45.5	450	6526
F45ORFS0411	-4	1/4"	6.4	13/16"	16	24	18	49	450	6526
F45ORFS0509	-5	5/16"	7.9	11/16"	16	22	15.5	46	350	5076
* F45ORFS0606	-6	3/8"	9.5	9/16"	18	19	24	55	445	6454
F45ORFS0609	-6	3/8"	9.5	11/16"	16	22	13	51	445	6454
F45ORFS0611	-6	3/8"	9.5	13/16"	16	24	17	52	445	6454
* F45ORFS0809	-8	1/2"	12.8	11/16"	16	22	26	72	415	6019
F45ORFS0811	-8	1/2"	12.8	13/16"	16	24	18	58	415	6019
F45ORFS0813	-8	1/2"	12.8	1"	14	30	20	61	415	6019
F45ORFS0814	-8	1/2"	12.8	1.3/16"	12	36	24	62	415	6019
F45ORFS1013	-10	5/8"	16	1"	14	30	20	55	350	5076
F45ORFS1014	-10	5/8"	16	1.3/16"	12	36	21	57	350	5076
F45ORFS1214	-12	3/4"	19	1.3/16"	12	36	23	58	350	5076
F45ORFS1215	-12	3/4"	19	1.7/16"	12	41	27	62.5	350	5076
* F45ORFS1614	-16	1"	25.4	1.3/16"	12	36	43	96.5	280	4061
F45ORFS1615	-16	1"	25.4	1.7/16"	12	41	26	81	280	4061
F45ORFS2021	-20	1.1/4"	31.8	1.11/16"	12	50	34	93	210	3046
F45ORFS2432	-24	1.1/2"	38.1	2"	12	60	45	112	185	2683