




METRIC FEMALE 24° CONE - 45° ELBOW - L TYPE (2)

FEMMINA 45° METRICA O-RING 24° DKOL CON O-RING
 FEMELLE 45° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L
 DKO-L 45° BOGEN INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA A 45° CON O-RING CONO 24° - SERIE L

* CRIMPED NUT
 DADO PINZATO

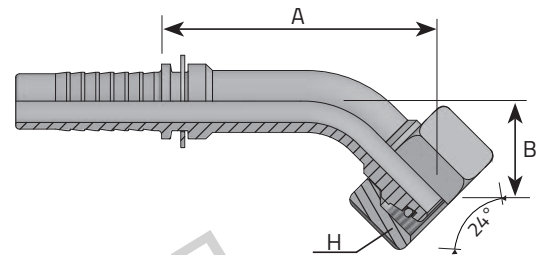

Code	Tube		Thread	Dimensions				Pressure		
	D.N.	Hose		Diam	T	D	H	B	A	Bar
		Inch	mm	mm	mm	mm	mm	mm		
F45E1026L18	-10	5/8"	16	M26 x 1.5	18	32	28	61.5	160	2320
F45E1030L22	-10	5/8"	16	M30 x 2	22	36	30	63.5	160	2320
* F45E1226L18	-12	3/4"	19	M26 x 1.5	18	32	33.5	63	160	2320
F45E1230L22	-12	3/4"	19	M30 x 2	22	36	27	63	160	2320
F45E1636L28	-16	1"	25.4	M36 x 2	28	41	38.5	85.5	100	1450
F45E2045L35	-20	1.1/4"	31.8	M45 x 2	35	50	35	104.5	100	1450
F45E2452L42	-24	1.1/2"	38.1	M52 x 2	42	60	45	119	100	1450