




## METRIC FEMALE 24° CONE - 45° ELBOW - L TYPE (2)

FEMMINA 45° METRICA O-RING 24° DKOL CON O-RING  
 FEMELLE 45° MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE L  
 DKO-L 45° BOGEN INNENGEWINDE MIT O-RING 24° KONUS  
 HEMBRA MÉTRICA A 45° CON O-RING CONO 24° - SERIE L

\* CRIMPED NUT  
 DADO PINZATO

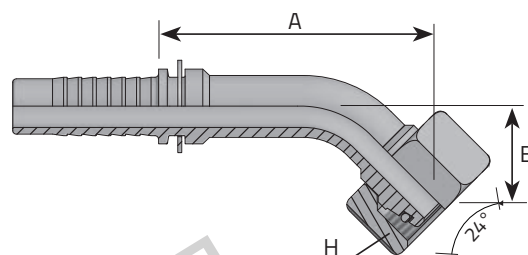

| Code          | Tube |        | Thread | Dimensions |    |    |      | Pressure |     |      |
|---------------|------|--------|--------|------------|----|----|------|----------|-----|------|
|               | D.N. | Hose   |        | Diam       | T  | D  | H    | B        | A   | Bar  |
|               |      | Inch   | mm     | mm         | mm | mm | mm   | mm       |     |      |
| F45E1026L18   | -10  | 5/8"   | 16     | M26 x 1.5  | 18 | 32 | 28   | 61.5     | 160 | 2320 |
| F45E1030L22   | -10  | 5/8"   | 16     | M30 x 2    | 22 | 36 | 30   | 63.5     | 160 | 2320 |
| * F45E1226L18 | -12  | 3/4"   | 19     | M26 x 1.5  | 18 | 32 | 33.5 | 63       | 160 | 2320 |
| F45E1230L22   | -12  | 3/4"   | 19     | M30 x 2    | 22 | 36 | 27   | 63       | 160 | 2320 |
| F45E1636L28   | -16  | 1"     | 25.4   | M36 x 2    | 28 | 41 | 38.5 | 85.5     | 100 | 1450 |
| F45E2045L35   | -20  | 1.1/4" | 31.8   | M45 x 2    | 35 | 50 | 35   | 104.5    | 100 | 1450 |
| F45E2452L42   | -24  | 1.1/2" | 38.1   | M52 x 2    | 42 | 60 | 45   | 119      | 100 | 1450 |